

MATCHING PAD

50ohm BNC To 75ohm BNC

MVE Impedance matching pads are used to match 2 different impedances and connect the interface between 50ohm & 75 ohm sides. The typical loss for these matching pads is 5.7dB.

SPECIFICATION

TEMPERATURE RANGE: -10°C To +50°C


PART NUMBER	FREQUENCY	50 ohm CONNECTOR	75 ohm CONNECTOR	INSERTION LOSS	VSWR MAX.	AVERAGE POWER
MPD1011.02	DC-3GHz	BNC Female	BNC Male	5.7±0.5dB	1.15:1	2 Watt

MATERIALS

BODY: BRASS, NICKEL PLATED
CENTER CONTACT: BRASS, GOLD PLATED

Tolerance: X= ±0.5

Outline Drawing (Unit: mm)

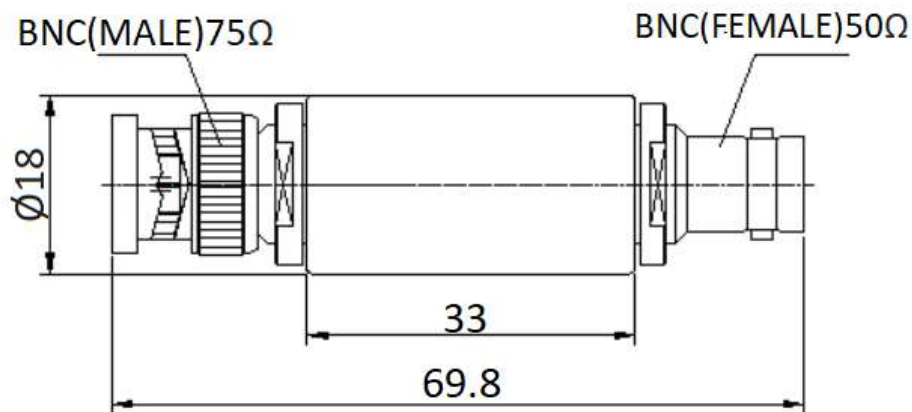

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

