

## MATCHING PAD

## 50OHM BNC To 75OHM BNC


MVE Impedance matching pads are used to match 2 different impedances and connect the interface between 50ohm & 75 ohm sides. The typical loss for these matching pads is 5.7dB.

### SPECIFICATION

PART NUMBER	FREQUENCY	50OHMS CONNECTOR	75OHMS CONNECTOR	INSERTION LOSS	VSWR MAX.	INPUT POWER AVG.
MPD1011.04	DC-2GHz	BNC Male	BNC Female	-5.7dB±0.5	1.2:1	1 Watt
MATERIALS						
BODY: BRASS, NICKEL PLATED CENTER CONTACT: BRASS, GOLD PLATED(M) INSULATOR:PTFE TEFLON						

Tolerance: X= ±0.5

### Outline Drawing (Unit: mm)

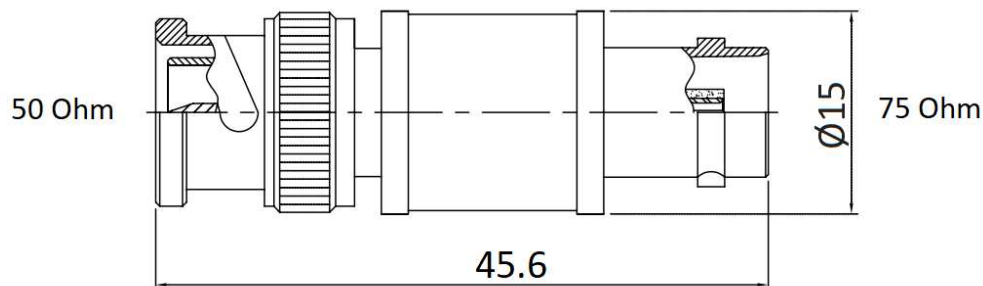

#### NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

