

CALIBRATION KITS

MCAL-3301S 3.5mm Female

MCAL-3301SS 3.5mm Male

Features:

- ✓ Standard Kit which includes open-short-load components.
- ✓ Low VSWR, Stainless Body design
- ✓ Frequency up to 26.5 GHz


SPECIFICATIONS:

Components including: Open / Short / Load

Electrical Specifications	
Load	Return Loss $\leq -32.25\text{dB}$ (VSWR ≤ 1.055)
Open	Phase Deviation $< \pm 1.5^\circ$ *
Short	Phase Deviation $< \pm 1.5^\circ$ *
Electrical Data	
Resistance	50 Ohm
Average Power	$\leq 0.5\text{W}$
Mechanical Data	
Mating cycles	>2000 times
Coupling torque	0.8~1.1 Nm
Open-end wrench size	8 mm
Material	Stainless steel
Environmental Data	
Operating Temperature	+15°C ~ +35°C
Storage Temperature	-40°C ~ +75°C

*Phase deviation: relative tolerance from standard phase

OUTLINE (UNIT: mm)

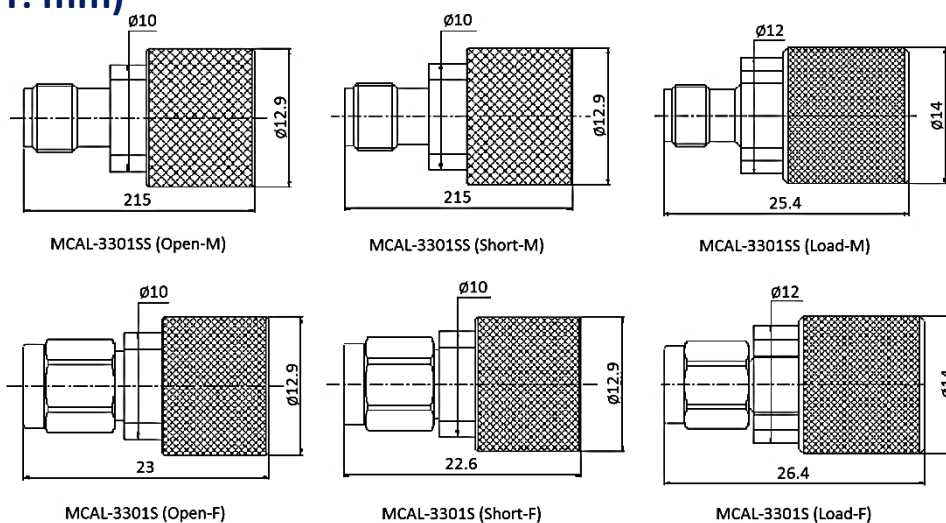

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

