

MATCHING PAD

50OHMS N To 75OHMS BNC

MVE Impedance matching pads are used to match 2 different impedances and connect the interface between 50ohm & 75 ohm sides. The typical loss for these matching pads is 5.7dB.

SPECIFICATION


PART NUMBER	FREQUENCY	50OHMS CONNECTOR	75OHMS CONNECTOR	INSERTION LOSS	VSWR MAX.	INPUT POWER AVG.
MPD1411.01	DC-3GHz	N Male	BNC Female	-5.7dB±0.5	1.15:1	2 Watt

MATERIALS

BODY: BRASS, NICKEL PLATED
CENTER CONTACT: BRASS, GOLD PLATED(M)
CENTER CONTACT: BERYLLIUM BRONZE, GOLD PLATED(F)

Outline Drawing (Unit: mm)

Tolerance: X= ±5%

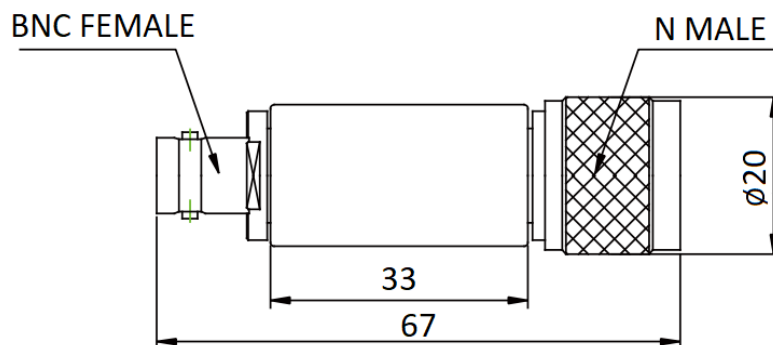

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

