


## LOW PASS FILTER

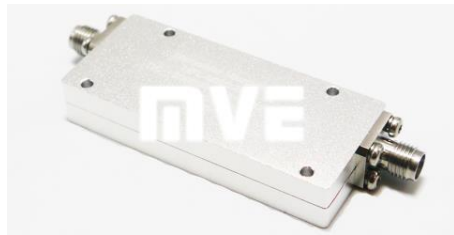

**MFL-0000.2000.S4**

**DC-2000MHz (PASSBANDS)  
2600MHz-6000MHz (REJECTBANDS)**


MVE's Low-pass filter can cut the guard band and preserve the band which you need in the lower frequency. This type of filter is especially useful since the random errors involved in the raw position data obtained through reconstruction are characterized by relatively high frequency contents.

## SPECIFICATIONS


Part Number	MFL-0000.2000.S4
Pass Band	DC-2000MHz
Insertion Loss	1.0dB MAX.
VSWR	1.5:1 MAX.
Reject Band Attenuation	≥50dB @ 2600-6000MHz
Temperature Range	-55 to +85°C
Average Power	≤40W
Impedance	50 Ohm
Connector Type	SMA Female
Size	55mm x 24mm x 10mm
SURFACE FINISH	ALUMINUM, SAND BLASTING

Tolerance: X= ±0.5

### Outline Drawing (Unit: mm)

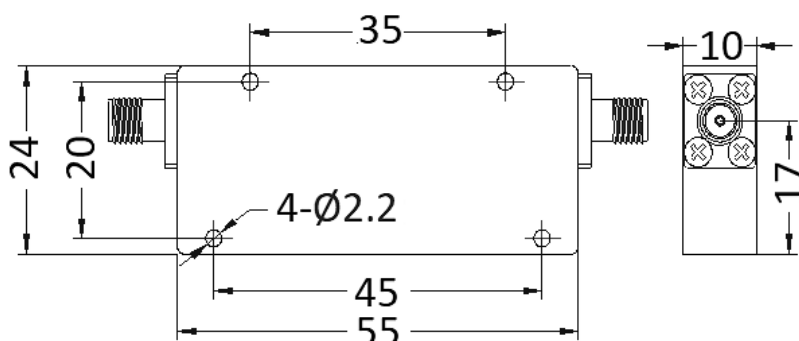

### Typical Test Result

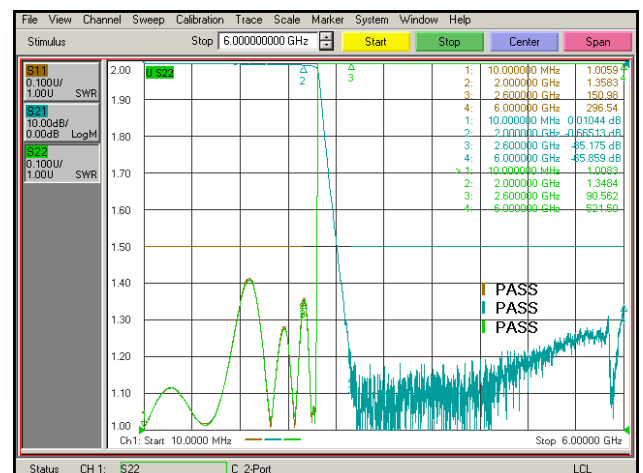

**NOTES:**

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

