

# NOTCH FILTER

**MFN-1805.1880.S3**

**1805MHz~1880MHz (REJECT BANDS)**




MVE's Notch filter can cut the guard band and preserve the band which you need in the specified frequency range. This type of filter is especially useful since you want to cut the band which is so closed to the in band. The products possess so superior performance with rejection.

## SPECIFICATIONS:

Part Number	MFN-1805.1880.S3
Reject Band	1805MHz~1880MHz
Pass Band	DC-1790MHz; 1895-3000MHz
Insertion Loss	≤2.0dB
Attenuation	40dB MIN.
VSWR	2.0:1 MAX.
Average Power	20W
Temperature	-55 to +85 °C
Connector Type	SMA Female
Size	157mm x 40mm x 22mm

Tolerance:±0.5mm

## Outline Drawing (Unit: mm)

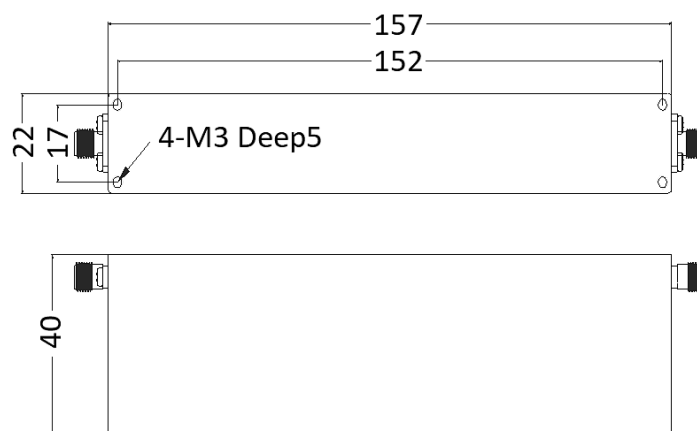

### NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

