

NOTCH FILTER



MFN-3400.3700.S2
3400MHz~3700MHz (REJECT BAND)


MVE's Notch filter can cut the guard band and preserve the band which you need in the specified frequency range. This type of filter is especially useful since you want to cut the band which is so closed to the in band. The products possess so superior performance with rejection.

SPECIFICATIONS:

Part Number	MFN-3400.3700.S2
Reject Band	3400MHz~3700MHz
Pass Band	DC~3370MHz; 3730~10000MHz
Insertion Loss	2.0 dB MAX.
Attenuation	45dB MIN.
VSWR	2.0:1 MAX.
Average Power	10W
Connector Type	SMA Male / SMA Female
Temperature	0°C~+60°C
Size	164mm x 32mm x 22mm

Tolerance: $\pm 0.5\text{mm}$

Outline Drawing (Unit: mm)

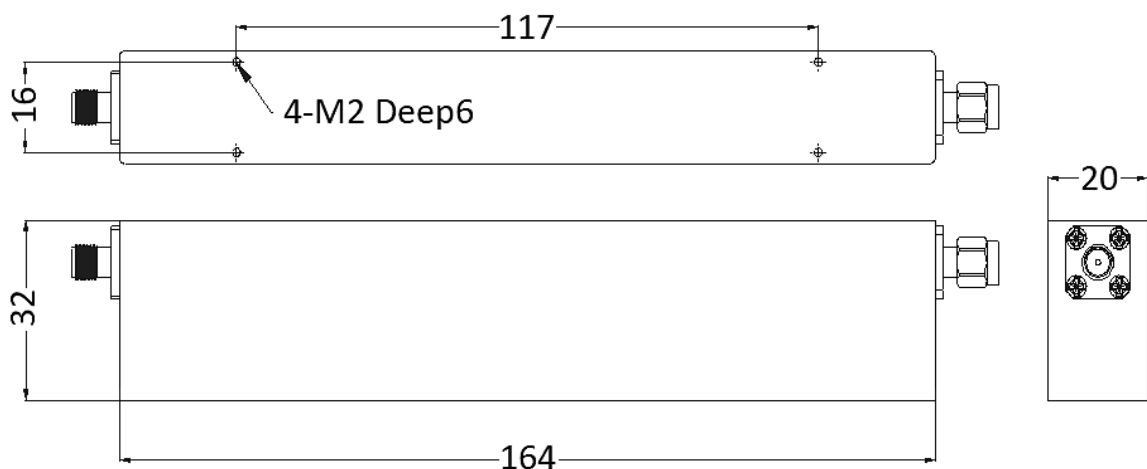

NOTES:
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

