

# WAVEGUIDE CIRCULATOR

WR90

## Features


- ✓ Frequency Range: 8.2-12.4GHz
- ✓ WR90 waveguide design, connect to UBR100 Mod
- ✓ Customer specify center frequency and bandwidth

## Specifications

<b>PART NUMBER</b>	MWCR9001
<b>DESCRIPTION</b>	WR90, 8.2-12.4GHz Waveguide Circulator
<b>ELECTRICAL</b>	<b>MATERIALS</b>
FREQUENCY : 8.2-12.4GHz WAVEGUIDE: WR90 VSWR: 1.2:1 MAX. INSERTION LOSS: 0.5dB MAX. FLANGE: UBR100 ISOLATION: 21dB MIN. HANDLING POWER(AVG.): 150W	BODY: ALUMINUM FINISH: CHROMATE CONVERSION

Tolerance:±0.2mm

## Outline Drawing (Unit: mm)

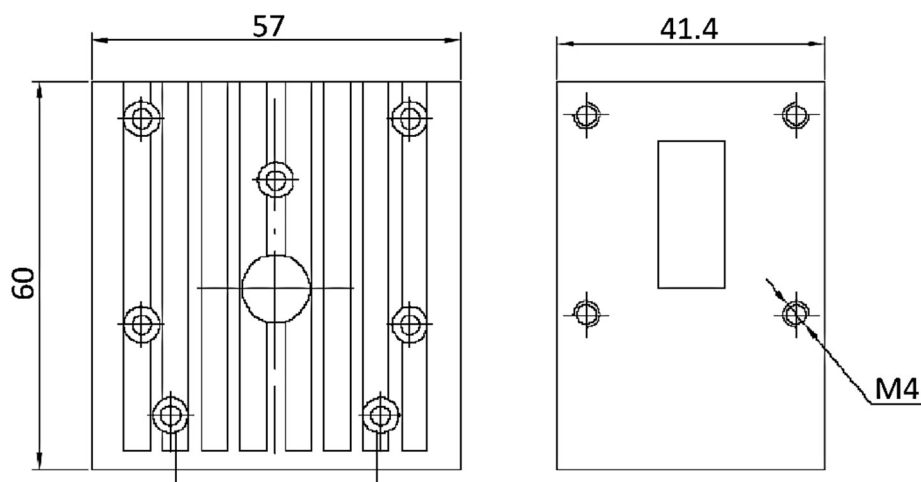

### NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

