

COAXIAL ADAPTER

Fakra-SMA Standard Series

Features

- ✓ Farka interface
- ✓ Frequency up to 6 GHz
- ✓ Low VSWR





Specifications

PART NUMBER	MVE1767
DESCRIPTION	Fakra Female To SMA Female Adapter, DC-6GHz
ELECTRICAL	MATERIALS
FREQUENCY: DC-6GHz IMPEDANCE: 50Ω VSWR: 1.42:1 DC-4GHz ; 1.5:1 DC-6GHz DIELECTRIC WITHSTANDING VOLTAGE:750Vrms INSULATION RESISTANCE:1000Mega-Ohms CENTER CONTACT RESISTANCE: 8.0 mini Ohms OUTER CONTACT RESISTANCE:6.0mini Ohms TEMPERATURE RANGE: -40°C~85°C	BODY: BRASS,NICKLE PLATED FEMALE CONDUCTOR:PHOSPHOR BRONZE, GOLD PLATED FEMALE INSULATION:TEFLON LOCK RING: NYLON,Z CODE(WATER BLUE) C-RING: SK-5,NICKEL PLATED HOUSING: NYLON,Z CODE(WATER BLUE)
	MECHANICAL
	COUPLING METHOD: SNAP-ON DURABILITY: 100CYCLE MIN. ENGAGEMENT FORCE:25N MAX. DISENGAGEMENT FORCE:2N MIN.

Tolerance: X= ±0.38 .X= ±0.25 .XX= ±0.15

Outline Drawing (Unit: mm)

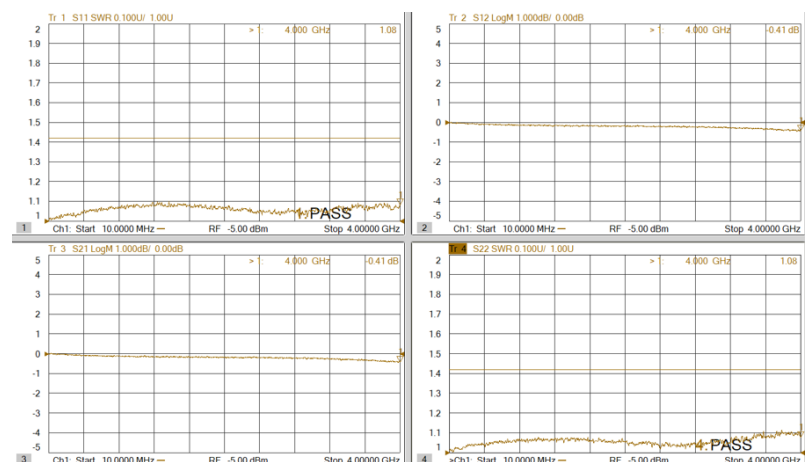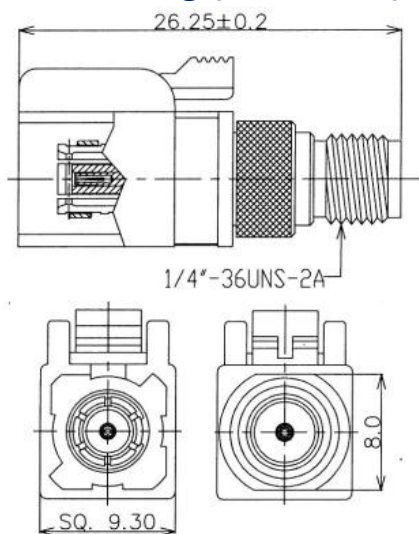

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

