

MATCHING PAD

50ohm N – 75ohm N

Features

- ✓ Impedance Matching
- ✓ Frequency up to 3GHz
- ✓ Temperature Range: -40°C ~ +70°C

SPECIFICATION

PART NUMBER	FREQUENCY	50ohm CONNECTOR	75ohm CONNECTOR	INSERTION LOSS	VSWR MAX.	AVERAGE POWER
-------------	-----------	-----------------	-----------------	----------------	-----------	---------------


MPD1514.01	DC-3GHz	N Female	N Male	-5.7+/-0.5dB	1.15:1	2 Watt
------------	---------	----------	--------	--------------	--------	--------

MECHANICAL

MATERIALS	FINISH
BODY : BRASS CENTER CONTACT: BRASS & BERYLLIUM COPPER, INSULATOR: PTFE TEFLON	BODY : NICKEL PLATED CENTER CONTACT: GOLD PLATED

Tolerance: ±0.5mm

Outline Drawing (Unit: mm)

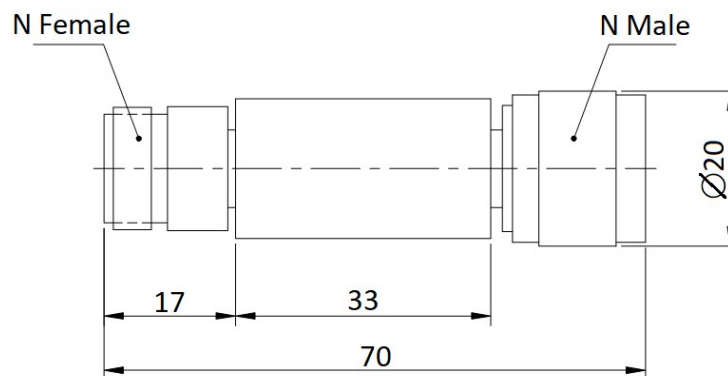

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

