

COAXIAL ADAPTER

MMCX-MMCX Standard Series

Features

- ✓ Frequency up to 6GHz
- ✓ MMCX Interface
- ✓ Low VSWR


Specifications

| | |
|--------------------|--|
| PART NUMBER | MVE1367 |
| DESCRIPTION | MMCX Male To MMCX Male Adapter,DC-6GHz |

| ELECTRICAL | MATERIALS |
|--|---|
| FREQUENCY : DC-6GHz IMPEDANCE: 50 Ω VSWR: 1.2:1 MAX. DIELECTRIC WITHSTANDING VOLTAGE: 1000V INSULATION RESISTANCE: 5000MΩ MIN. | BODY: BRASS, GOLD PLATED CONTACT: COPPER BERYLLIUM ALLOY, GOLD PLATED INSULATOR: PTFE |
| | MECHANIAL |
| | TEMPERATURE RANGE: -65~+165°C DURABILITY: 500 CYCLE MIN. |

Outline Drawing (Unit: mm)

TOLERANCE: X=±0.2 X.X=±0.1 .XX=±0.05

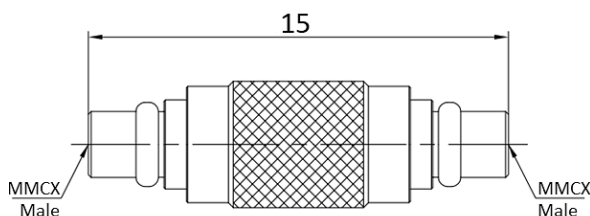

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY