

COAXIAL ADAPTER

Features

- ✓ Frequency Range: DC to 10GHz
- ✓ High Durability
- ✓ Low VSWR


Specifications

N-SMA Precision Series




PART NUMBER	MVE1381B	
DESCRIPTION	50ohm N Male Hex To SMA Female, DC-10GHz Adapter	
ELECTRICAL		MATERIALS
FREQUENCY: DC-10GHz		BODY: BRASS, NICKLE-PLATED
IMPEDANCE: 50 Ohms		PIN CONTACT: PHOSPHOR BRONZE, GOLD PLATED
VSWR: 1.25:1 MAX.		COUPLING NUT: BRASS, NICKEL-PLATED
DURABILITY: >500		O-RING: SILICONE RUBBER
INSULATION RESISTANCE: ≥5000MΩ		INSULATOR: PTFE
WITHSTANDING VOLTAGE: 1000V		
TEMPERATURE RANGE: -55 °C ~+165 °C		

Tolerance: ±0.5mm Outline Drawing (Unit: mm)



Typical Test Result

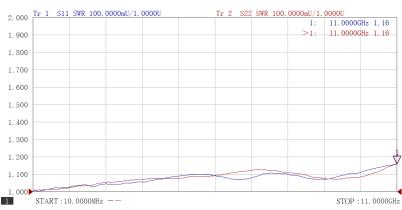

NOTES: 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

4F., No.258, Sec. 1, Wenhua 1st Rd., Linkou Dist., New Taipei City 244, Taiwan (R.O.C.) www.micro-mve.com E-mail:sales@micro-mve.com Tel: +886-2-2602-0660

