

COAXIAL ADAPTER

BNC-SMA Standard Series

Features


- ✓ Frequency Range: DC to 8GHz
- ✓ Low VSWR
- ✓ High Durability



Specifications

PART NUMBER	MVE1589
DESCRIPTION	SMA Female To BNC Male Adapter, DC-8GHz
ELECTRICAL	MATERIALS
FREQUENCY: DC-8GHz IMPEDANCE: 50Ω VSWR: 1.15:1 MAX. DURABILITY: 500 CYCLES MIN. TEMPERATURE RANGE: -55°C ~ +165°C	BODY: STAINLESS STEEL (SU303), PASSIVATED PIN CONTACT: BERYLLIUM COPPER ALLOY, GOLD-PLATED INSULATOR: PEI, PTFE

Tolerance: X= ±0.5mm .X= ±0.2mm
Outline Drawing (Unit: mm)

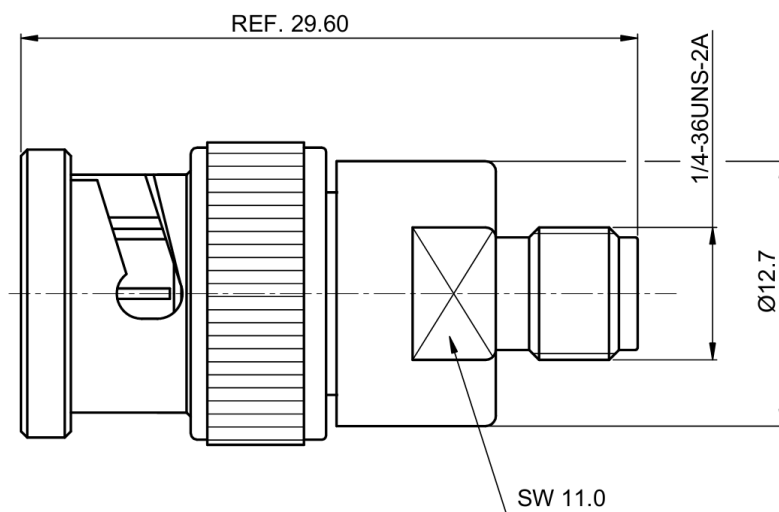

NOTES:
 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

