

COAXIAL ADAPTER

SMA-SMP Precision Series

Features

- ✓ Frequency up to 26.5GHz
- ✓ Low VSWR
- ✓ SMP to SMA Type Interface




Specifications

PART NUMBER	MVE1604B
DESCRIPTION	SMP Male To SMA Female Adapter, DC-26.5GHz/Stainless
ELECTRICAL	FREQUENCY : DC-26.5GHz IMPEDANCE: 50Ω VSWR: 1.3:1 MAX.
MECHANIAL	TEMPERATURE RANGE: -55~+165°C DURABILITY: 500CYCLE MIN
MATERIALS	BODY: STAINLESS STEEL, PASSIVATED INSULATOR: PEI, PTFE PIN CONTACT: BERYLLIUM COPPER ALLOY, GOLD-PLATED

TOLERANCE: X=±0.5 X.X=±0.2 .XX=±0.1

Outline Drawing (Unit: mm)

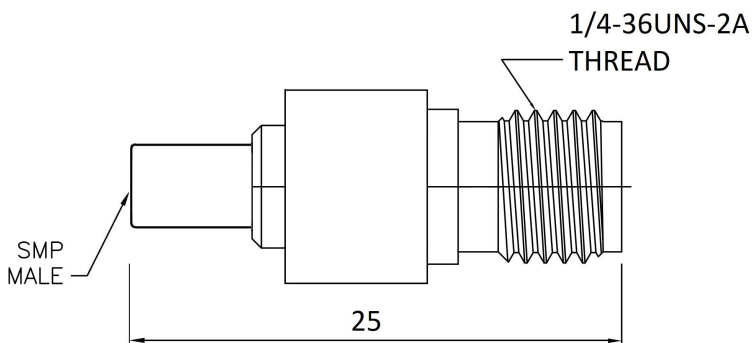

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Typical Test Result

