

WAVEGUIDE ADAPTER

SMA-WR90

Features


- ✓ Low VSWR
- ✓ Frequency: 8.2-12.4GHz
- ✓ High Durability




Specifications

PART NUMBER	MVE17019
DESCRIPTION	SMA Male To WR90, 8.2-12.4GHz Waveguide Adapter
ELECTRICAL	MATERIALS
FREQUENCY: 8.2-12.4GHz WAVEGUIDE: WR90 VSWR: 1.25:1 MAX INSERTION LOSS: 0.3dB MAX FLANGE: FBP100 CONNECTOR: SMA Male	BODY: BRASS COPPER, GOLD PLATED COATING: INSIDE — SILVER PLATED; OUTSIDE — ANTICORROSION GREY PAINT

Outline Drawing (Unit: mm)

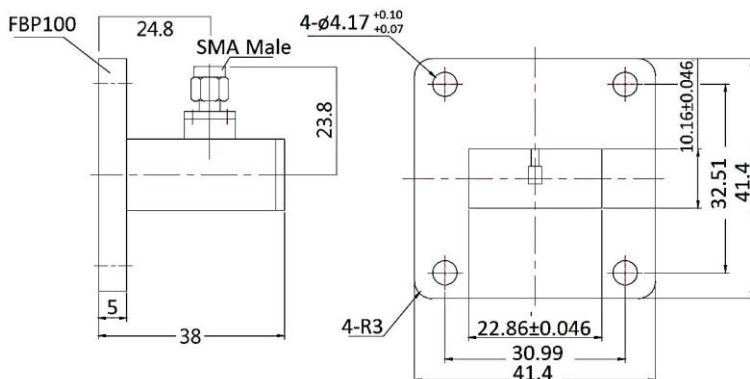

Typical Test Result

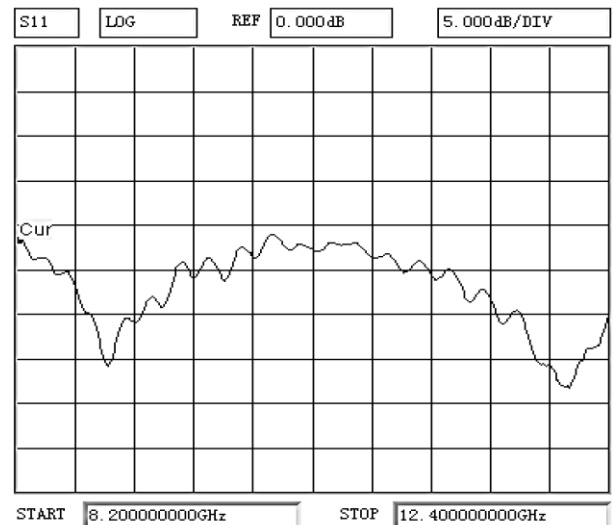

NOTES:
 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY