

COAXIAL ADAPTER

SMA-SMA Precision Series

Features

- ✓ Frequency up to 27 GHz
- ✓ High Durability
- ✓ Low VSWR




Specifications


PART NUMBER	MVE1709
DESCRIPTION	SMA Female To SMA Female, 27GHz Adapter / Stainless
ELECTRICAL	FREQUENCY: DC-27GHz IMPEDANCE: 50Ω VSWR: 1.15:1 MAX.
MECHANIAL	TEMPERATURE RANGE: -55°C~+165°C DURABILITY: 500CYCLE MIN.
MATERIALS	BODY: STAINLESS STEEL, PASSIVATED INSULATOR: PEI, PTFE PIN CONTACT: BERYLLIUM COPPER ALLOY, GOLD-PLATED

TOLERANCE: X=±0.5 X.X=±0.2 X.XX=±0.1

Outline Drawing (Unit: mm)

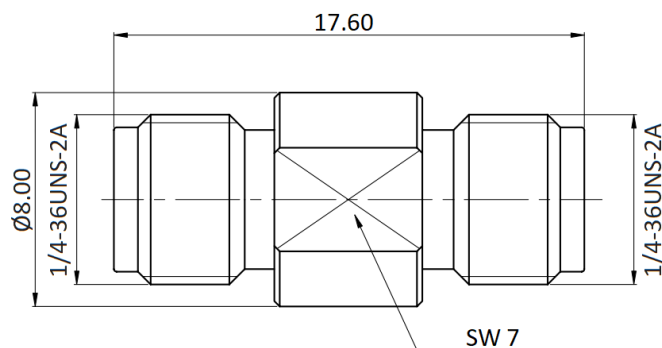

Typical Test Result

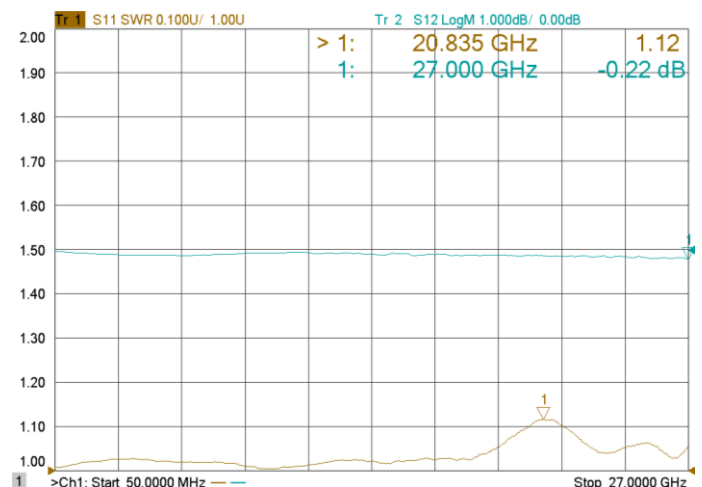

NOTES:
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

