

COAXIAL ADAPTER

SMA-SMA Precision Series

Features

- ✓ Frequency up to 18GHz
- ✓ Low VSWR
- ✓ High Durability




Specifications

PART NUMBER	MVE1719
DESCRIPTION	SMA Male To SMA Male, DC-18GHz Adapter/Stainless
ELECTRICAL	MATERIALS
FREQUENCY: DC-18GHz IMPEDANCE: 50OHMS WORKING VOLTAGE: 500Vrms MAX. DIELECTRIC WITHSTANDING VOLTAGE: 1000Vrms MAX. INSULATOR RESISTANCE: 5000 MEGAOHMS MIN. VSWR: 1.25:1 MAX.	BODY: BRASS, GOLD PLATED CONTACT: BRASS, GOLD PLATED SHELL: STAINLESS STEEL, PASSTIVATED INSULATOR: PTFE GASKET: SILICON C-RING: BE COPPER

Tolerance: X= ± 0.2 X.X= ± 0.1 X.XX= ± 0.05

Outline Drawing (Unit: mm)

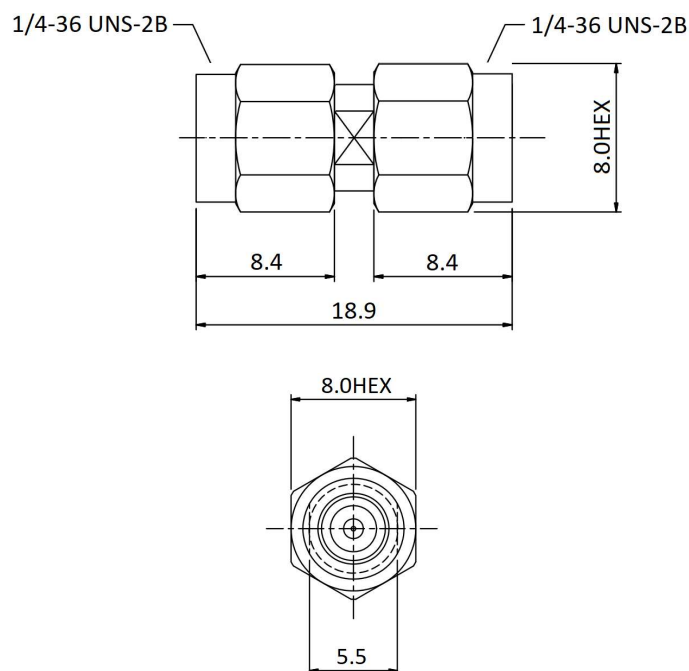

NOTES:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Typical Test Result

