

## ELECTRICAL DATA

FREQUENCY : DC-8GHz

IMPEDANCE: 50Ω

VSWR:1.5:1MAX.

DIELECTRIC WITHSTANDING VOLTAGE: 500 Vrms

WORKING VOLTAGE: 170 Vrms MAX.

INSULATION RESISTANCE: 1000Mega Ohms

CENTER CONTACT RESISTANCE: 6.0 mini Ohm

OUTER CONTACT RESISTANCE: 2.5 mini Ohm

## MECHANICAL DATA


COUPLING METHOD:THREADED

DURABILITY(MATING/UNMATING):10000 Cycles



## APPLICATION



Fully mating with Hirose U.FL , IPEX MHF.

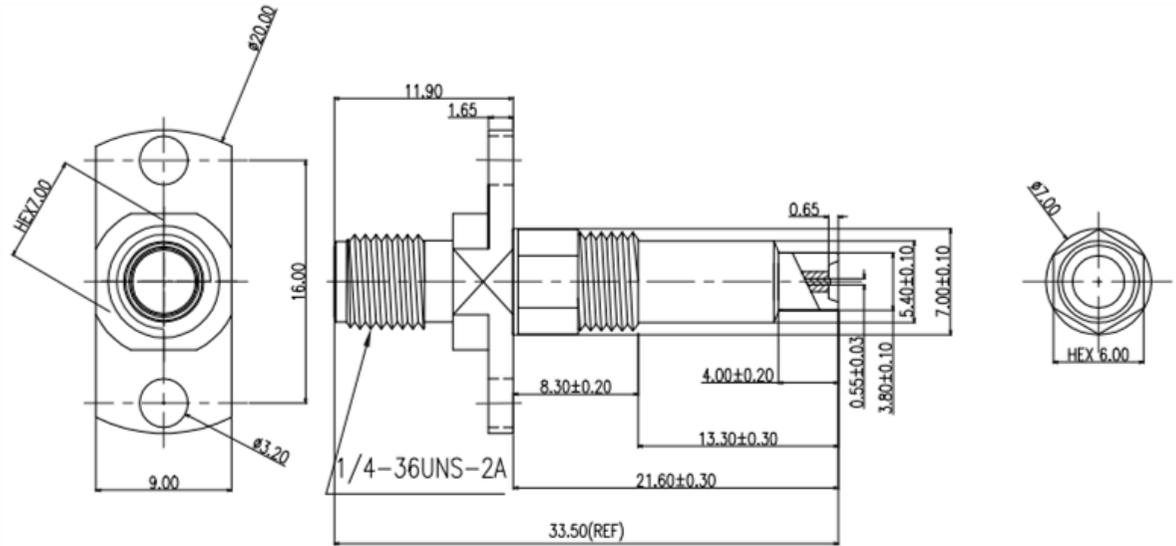

## Typical Test Result

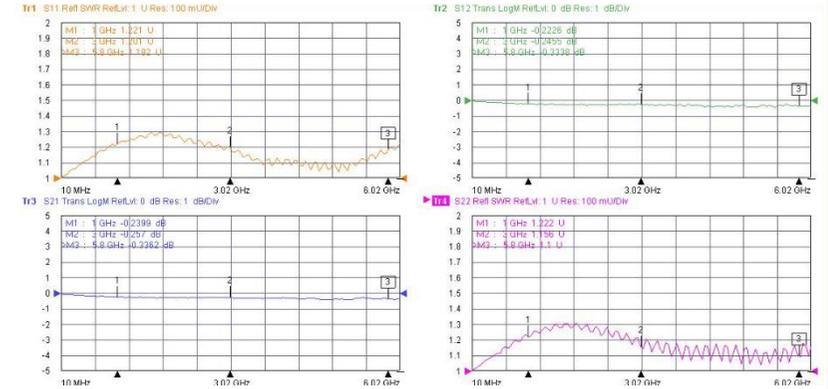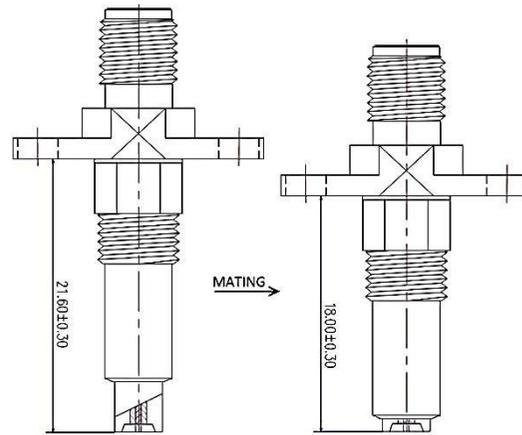

DESCRIPTION	MATERIALS	ROHS COMPLIANCE	UNIT: mm
BODY	BRASS, GOLD PLATED	TOLERANCE:±0.1	
CENTER PIN	BRASS,GOLD PLATED	TITLE U.FL To SMA Female 2 Hole Adapter, DC-8GHz	
SPRING	SUS304		
INSULATOR	TEFLON		

## NOTES

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

**MVE** 芝程科技有限公司  
Microwaves

[www.micro-mve.com](http://www.micro-mve.com)

DC-67GHz RF& Microwave Components

PART NO.	<b>MVE1998</b>	REV	4.1
SIZE: A3	SHEET: 1/1	SCALE:	