

FIXED ATTENUATOR

F TYPE
5 to 3000MHz

Features

- ✓ F Type Interface
- ✓ High Accuracy
- ✓ Low VSWR



Specifications

PART NUMBER	IMPEDANCE	FREQUENCY	STANDARD VALUE	AVERAGE POWER	CONNECTOR TYPE
MVE2117-XX	75 ohm	5 – 3000MHz	1-10,16,20,30	<1 Watt	F Male- F Female

-XX: Insert dB value desired

ATTENUATION ACCURACY

1-20dB: ± 1.2 dB
30dB: ± 2.0 dB

RETURN LOSS

1-30dB: ≥ 14 dB

MATERIALS/FINISH


BODY: BRASS, NICKEL PLATED
CENTER CONTACT: BERYLLIUM COPPER, SILVER PLATED
INSULATOR: PTFE

ENVIRONMENTAL

TEMPERATURE RANGE: -40°C TO +85°C

Tolerance: X= ± 0.5

Outline Drawing (Unit: mm)

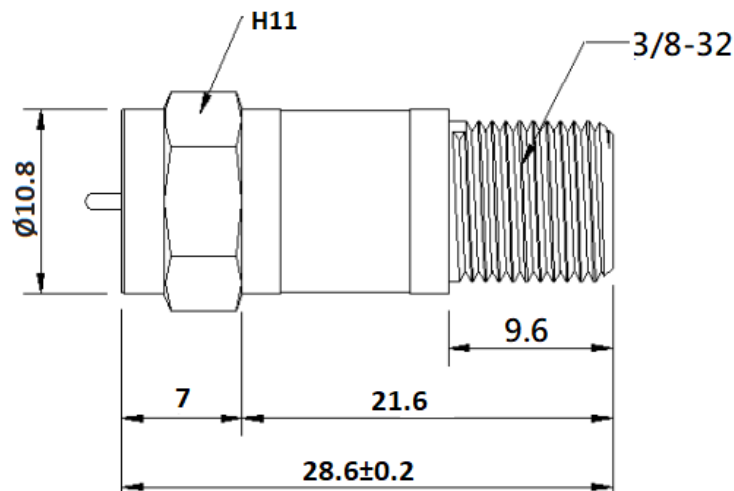

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY



Typical Test Result

