

FIXED ATTENUATOR

SMA 2W
DC to 12.4GHz

MVE2210-XX

Features

- ✓ High Accuracy
- ✓ Low VSWR
- ✓ Frequency Range: DC to 12.4GHz



Specifications

PART NUMBER	IMPEDANCE	FREQUENCY	STANDARD VALUE	VSWR	AVERAGE POWER	CONNECTOR TYPE
MVE2210-XX	50 Ohms	DC – 12.4GHz	1,2,3,5,6,10,20,30	1.30:1	2Watts	SMA

Tolerance: OTHERWISE SPEC. ± 0.5 , ANGLES $\pm 1^\circ$

ATTENUATION ACCURACY

- 1-10dB: ± 0.6 MAX.
- 11-20dB: ± 0.7 MAX.
- 21-30dB: ± 0.9 MAX.

POWER HANDLING

AVG. POWER: 2Watts @25°C


MATERIAL/FINISH

BODY: STAINLESS STEEL, PASSIVATED

ENVIRONMENTAL

TEMPERATURE RANGE: -55°C TO +125°C

Outline Drawing (Unit: mm)

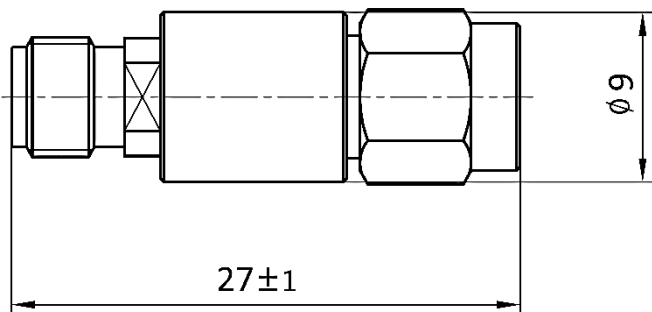

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Typical Test Result

