

# FIXED ATTENUATOR

## MVE2213-XX

DC to 18GHz  
2Watts

### Features

- ✓ Frequency up to 18GHz
- ✓ High Accuracy
- ✓ Stainless steel



### Specifications

| PART NUMBER | IMPEDANCE | FREQUENCY  | STANDARD VALUE   | VSWR (MAX.) | AVERAGE POWER | CONNECTOR TYPE |
|-------------|-----------|------------|------------------|-------------|---------------|----------------|
| MVE2213-XX  | 50 Ohms   | DC - 18GHz | 40dB, 50dB, 60dB | 1.30:1      | 2Watts @25°C  | SMA            |

-XX: Insert dB value desired

#### ATTENUATION ACCURACY

40dB: ±1.2 dB MAX.

50-60dB: ±1.5 dB MAX.

#### MATERIAL/FINISH


BODY: STAINLESS STEEL, PASSIVATED

#### ENVIRONMENTAL


TEMPERATURE RANGE: -55°C TO +125°C

Tolerance: ±0.5mm

### Outline Drawing (Unit: mm)

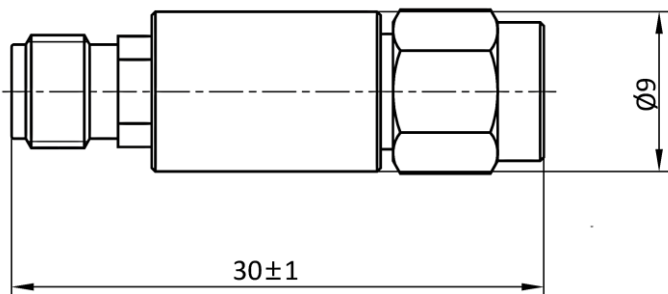

### Typical Test Result

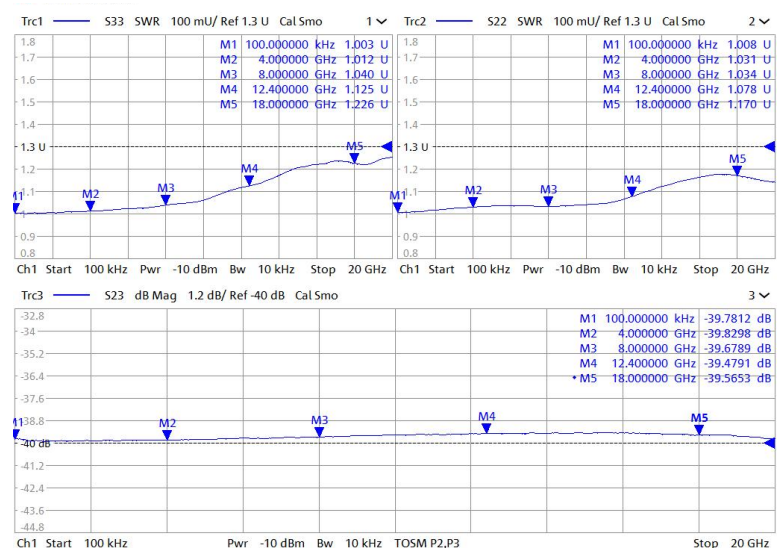

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

