

FIXED ATTENUATOR

DC to 6GHz, 5W
SMA TYPE

Features

- ✓ Frequency Range: DC to 6GHz
- ✓ High Accuracy
- ✓ Low VSWR



Specifications

PART NUMBER	IMPEDANCE	FREQUENCY	STANDARD VALUE	VSWR	AVERAGE POWER	CONNECTOR TYPE
MVE2215-XX	50 Ohm	DC – 6GHz	1,2,3,5,6,10,20,30,40-60	1.25:1	5 Watts @25°C	SMA(M-F)

-XX: Insert dB value desired

ATTENUATION ACCURACY

- 1-10dB: ±0.5dB MAX.
- 20dB: ±0.6dB MAX.
- 30dB: ±0.8dB MAX.

MATERIAL/FINISH


CONNECTOR: STAINLESS STEEL, PASSIVATED
HOUSING: ALUMINUM, BLACK ANODIZE

ENVIRONMENTAL


TEMPERATURE RANGE: -55°C TO +125°C

Tolerance: ±0.5mm

Outline Drawing (Unit: mm)

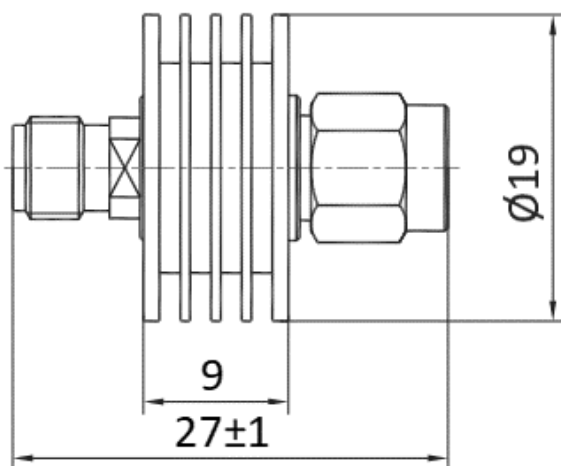

Typical Test Result (MVE2215-30)

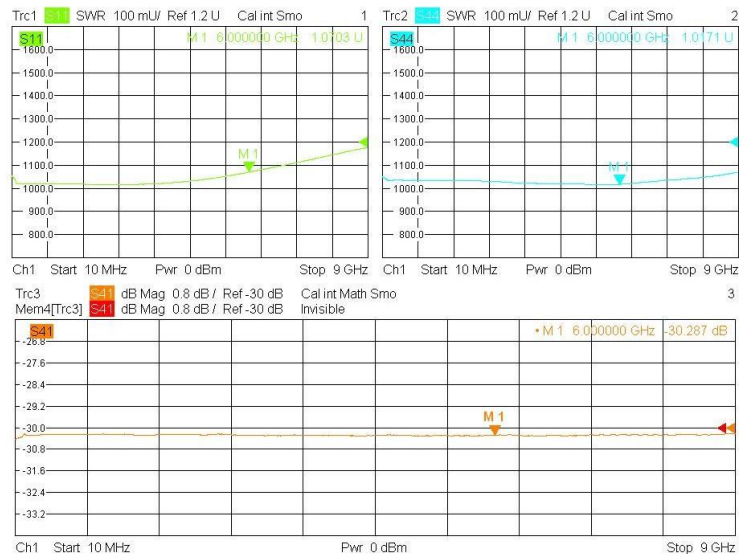

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

