

FIXED ATTENUATOR

MVE2467-XX

DC to 8GHz
100W

Features

- ✓ Frequency up to 8 GHz
- ✓ High Accuracy
- ✓ Low VSWR

Specifications

PART NUMBER	IMPEDANCE	FREQUENCY	STANDARD VALUE	VSWR	AVERAGE POWER	CONNECTOR TYPE
MVE2467-XX	50 Ohm	DC – 8GHz	6.10.20.30 40.50.60	1.25:1	100Watts @25°C	N MALE (RF IN)-FEMALE

-XX: Insert dB value desired

ATTENUATION ACCURACY

- 6-10dB: ±0.8dB MAX.
- 20dB:±0.8dB MAX.
- 30dB:±0.9dB MAX.
- 40dB:±0.9dB MAX.
- 50-60dB:±1.0dB MAX.

MATERIAL/FINISH


CONNECTOR: COPPER NICKEL PLATING
HOUSING: ALUMINUM, BLACK ANODIZE

ENVIRONMENTAL

TEMPERATURE RANGE: -55°C TO +125°C

Tolerance:±0.5mm

Outline Drawing (Unit: mm)

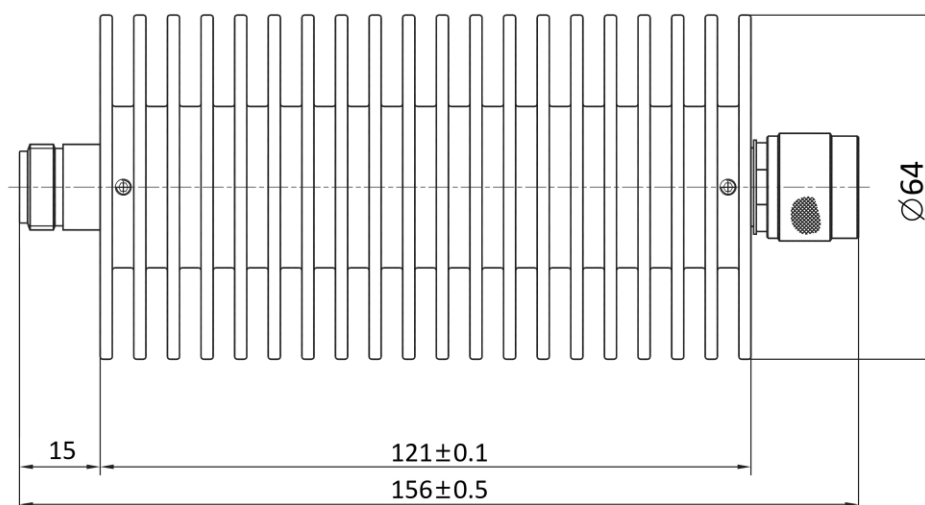

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

