

Waveguide Fixed Attenuator MVE2855-XX

WR15
50-75GHz

Features

- ✓ Broad Band Coverage
- ✓ High Accuracy
- ✓ Low VSWR



Specifications

PART NUMBER	IMPEDANCE	FREQUENCY	STANDARD VALUE	VSWR	FLANGE TYPE
MVE2855-XX	50 ohm	50-75GHz	30dB	1.2:1 MAX.	FUGP620

-XX: Insert dB value desired

ATTENUATION ACCURACY


30dB: ± 1.0 MAX.

MATERIAL/FINISH

BODY: COPPER
FINISH: GOLD PLATED

Tolerance: ± 0.2 mm

Outline Drawing (Unit: mm)

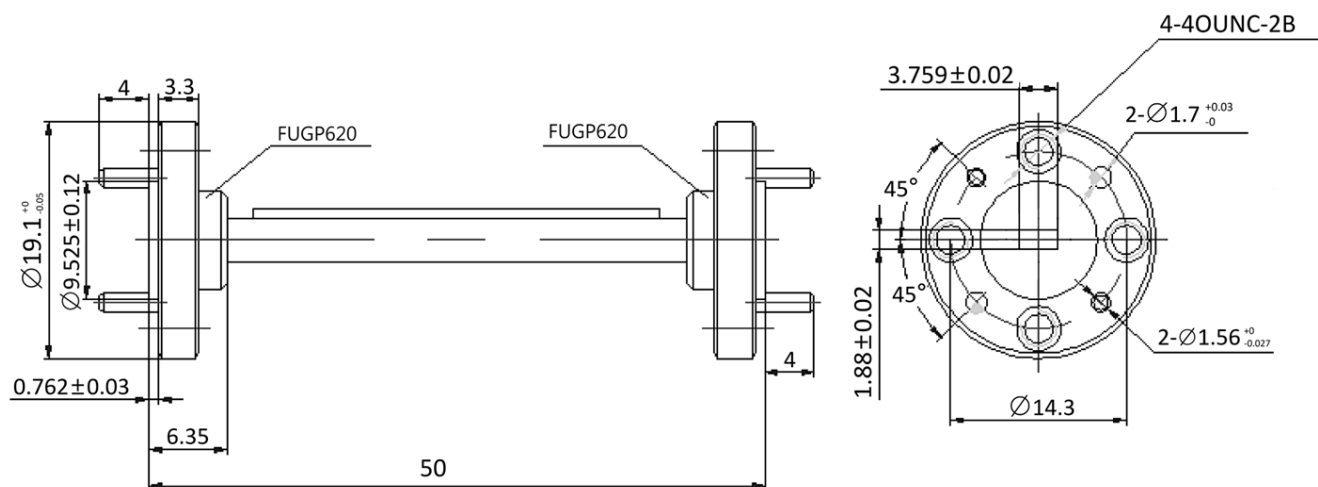

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLYONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME

