

DIRECTIONAL COUPLER

SMA Series
0.5-26.5GHz

Features

- ✓ Operating frequency range from 0.5-26.5GHz
- ✓ Full Frequency Bandwidth
- ✓ High Directivity

Specifications

FREQUENCY RANGE: 0.5-26.5GHz


CONNECTOR TYPE: SMA FEMALE

OPERATION TEMPERATURE RANGE: -45°C~+85°C

| PART NUMBER | FREQUENCY (GHz) | COUPLING VALUE | INSERTION LOSS | DIRECTIVITY | VSWR | POWER AVERAGE |
|-------------|-----------------|----------------|----------------|-------------|--------|---------------|
| MVE4861-13 | 0.5-26.5 | 13.0±1.0 dB | ≤2.1dB | ≥ 10dB | ≤ 1.60 | 20Watts |

Tolerance: ±0.5mm

Outline Drawing (Unit: mm)

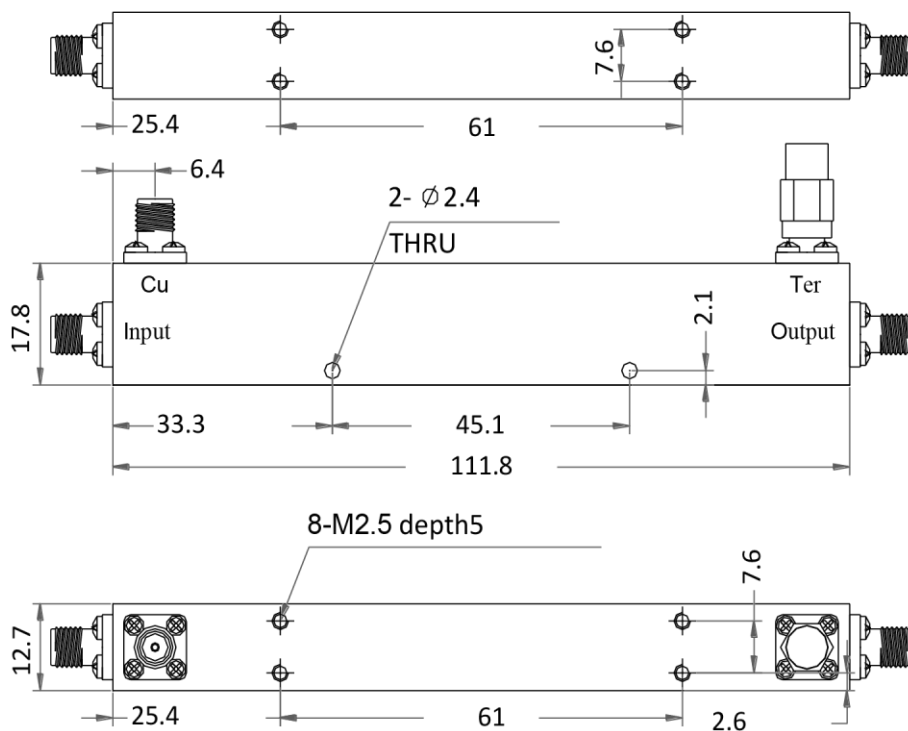

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

