

TERMINATION

6GHz SMA 10Watt

No.

Features

- ✓ Frequency up to 6 GHz
- ✓ Low VSWR
- ✓ High performance design


Specifications

PART NUMBER	MVE5114	
DESCRIPTION	SMA Male Termination, 10W DC-6GHz	
ELECTRICAL		MATERIALS
FREQUENCY : DC-6GHz IMPEDANCE: 500hm VSWR: 1.25:1 MAX. TEMPERATURE RANGE:-55~125°C POWER RATING:10W@25°C		CONNECTOR: BRASS, NICKLE PLATED BODY: ALUMINUM, BLACK ANODIZE

Tolerance: X= ±0.5 Outline Drawing (Unit: mm)


NOTES:

Typical Test Report

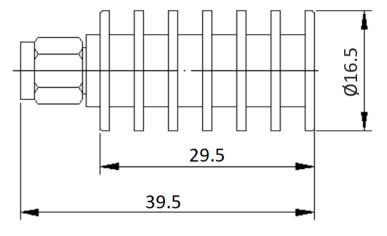

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME

2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY





4F., No.258, Sec. 1, Wenhua 1st Rd., Linkou Dist., New Taipei City 244, Taiwan (R.O.C.) www.micro-mve.com E-mail:sales@micro-mve.com Tel: +886-2-2602-0660