

TERMINATION

SMA Male 2Watts

Features

- ✓ Frequency up to 20GHz
- ✓ Low VSWR
- ✓ Delivery From Stock




Specifications

TEMPERATURE RANGE: -30°C TO +60°C


PART NUMBER	MVE5185
DESCRIPTION	SMA MALE 2W TERMINATION, DC-20GHz
ELECTRICAL	
FREQUENCY : DC-20GHz IMPEDANCE: 50OHM VSWR: 1.20:1 MAX(DC~20GHz) INPUT POWER: 2WATT AVG.	
MATERIALS	
BODY: BRASS, GOLD PLATED CENTER CONTACT: BRASS, GOLD PLATED INSULATOR: PTFE TEFLON COUPLING NUT: BRASS, NICKEL PLATED	

Tolerance:±0.2mm

Outline Drawing (Unit: mm)

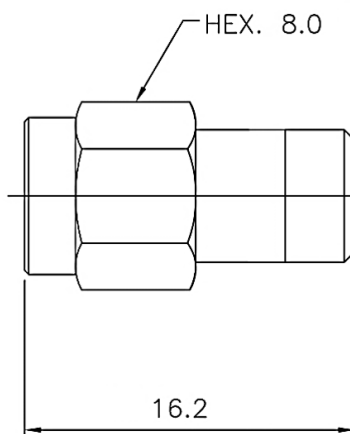

Typical Test Result

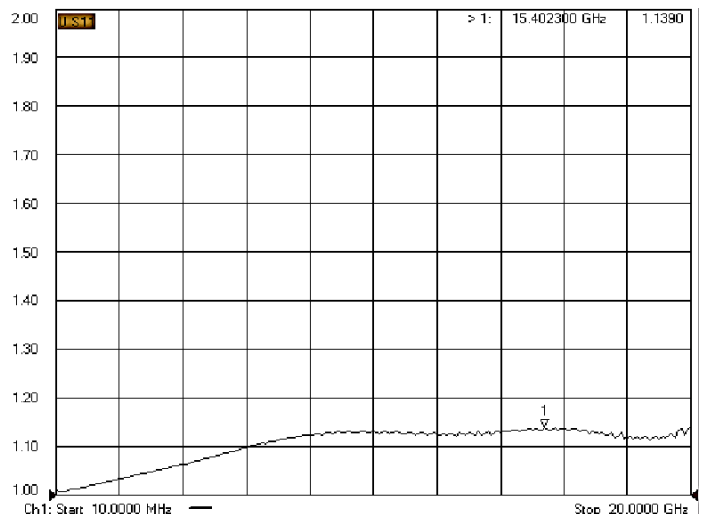

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

