

TERMINATION

2.4mm Male
1WATT

Features

- ✓ Frequency up to 50GHz
- ✓ Low VSWR
- ✓ High performance design





Specifications

PART NUMBER	MVE5190
DESCRIPTION	2.4mm Male Termination, 1W DC-50GHz
ELECTRICAL	
FREQUENCY: DC-50GHz IMPEDANCE: 50OHM VSWR: 1.25:1 MAX. (DC-40GHz); 1.30:1 MAX. (50GHz) AVERAGE POWER: 1W AVG. TEMPERATURE RANGE: -55°C TO +125°C DURABILITY: 500 MIN.	
MATERIALS	
BODY: STAINLESS STEEL, PASSIVATED CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED COUPLING NUT: STAINLESS STEEL, PASSIVATED	

Tolerance: ±0.5mm

Outline Drawing (Unit: mm)

Typical Test Result

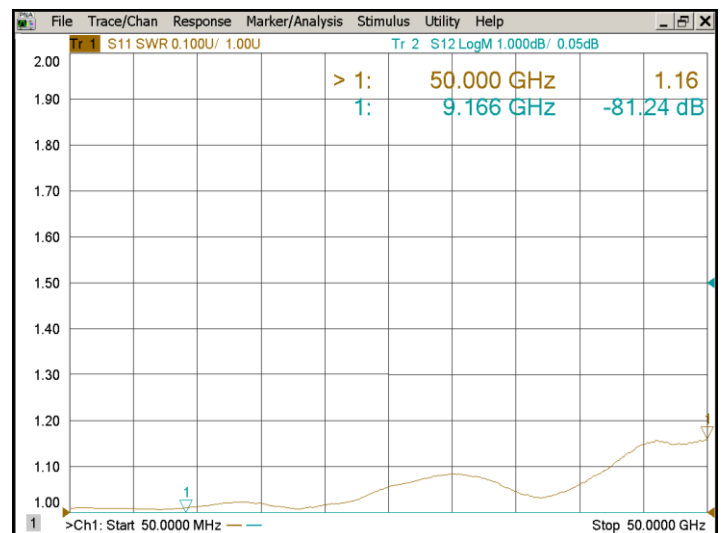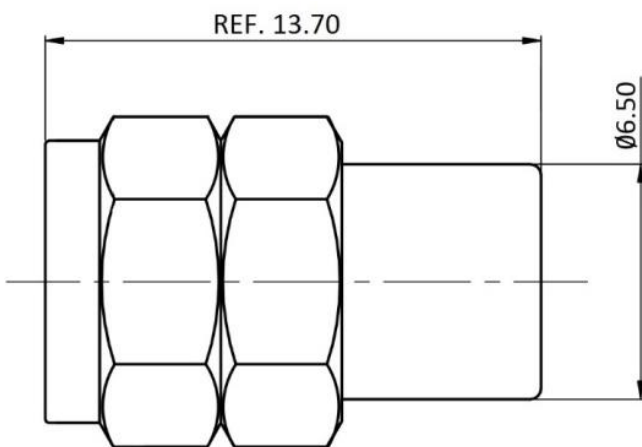

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

