

# COAXIAL CIRCULATOR

## N Series

### Features

- ✓ Frequency range: 225-400MHz
- ✓ Low Insertion Loss
- ✓ High Isolation

### Specifications

Connector Type: N FEMALE

Direction: Clockwise


Operating Temperature: -20 °C ~+70°C



PART NUMBER	FREQUENCY (MHz)	VSWR (MAX.)	INSERTION LOSS (dB MAX.)	ISOLATION (dB MIN.)	FORWARD POWER	CONNECTOR
MVE7110	225-400MHz	1.3:1	0.85	18	60W CW	N Female

Tolerance: X= ±0.5

### Outline Drawing (Unit: mm)

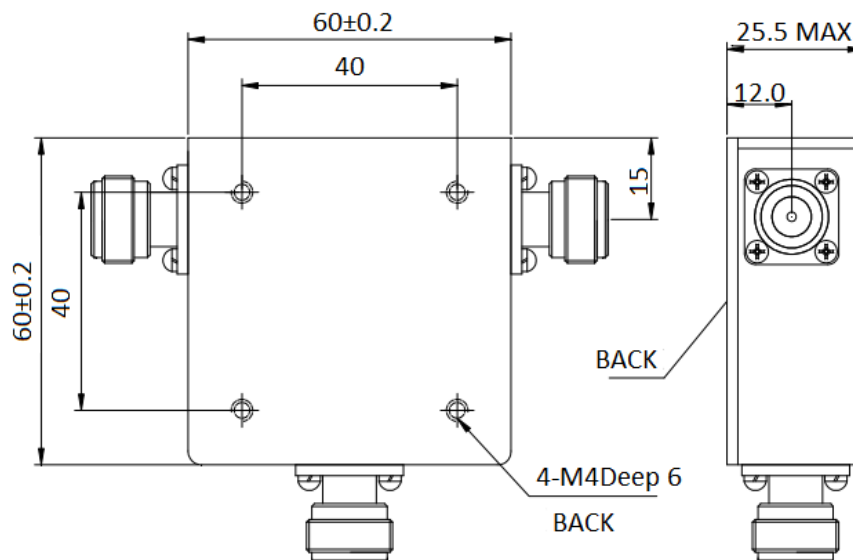

#### NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY



### Typical Test Result

