

# COAXIAL CIRCULATOR

**SMA Series**  
**1.0-2.0GHz**

## Features

- ✓ Wide frequency range: 1000~2000MHz partial or full band
- ✓ 50 Ohm N-type or SMA female connector In/out
- ✓ Small size, low cost
- ✓ Power handling +100 Watts forward
- ✓ Operating temperature 0~+60°C



## Specifications


CONNECTOR TYPE: SMA FEMALE

DIRECTION: CLOCKWISE 1→2→3

PART NUMBER	FREQUENCY (GHz)	VSWR (MAX.)	INSERTION LOSS (MAX.)	ISOLATION (dB MIN.)	FORWARD POWER	TEMPERATURE
MVE7122	1.0-2.0	1.4:1	0.7dB	17dB	100W	0 ~ +60°C

Tolerance: X= ±0.5

## Outline Drawing (Unit: mm)

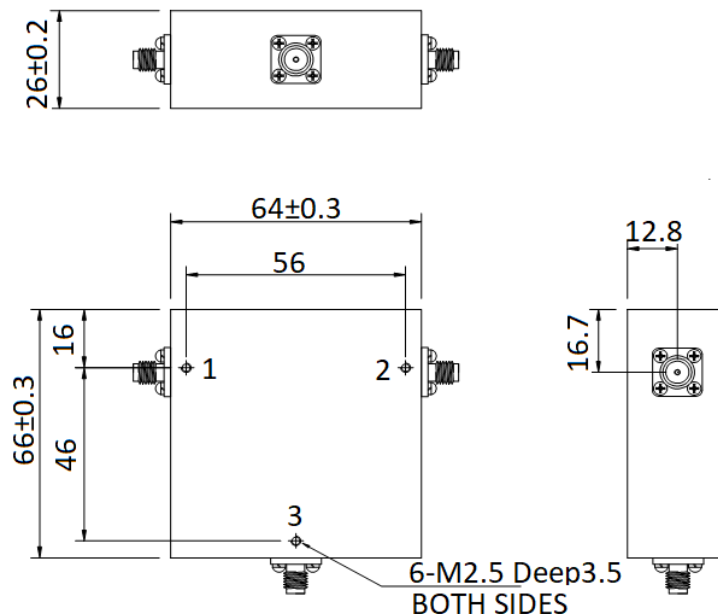

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

