

COAXIAL CIRCULATOR

0.6-1GHz
SMA Series

Features

- ✓ Frequency range cover from 0.6GHz to 1GHz
- ✓ Small size, SMA female connector In/out
- ✓ Low VSWR and low insertion loss

Specifications


CONNECTOR TYPE: SMA FEMALE

DIRECTION: CLOCKWISE 1→2→3, ANTICLOCKWISE 2→1→3

PART NUMBER	FREQUENCY (GHz)	VSWR	INSERTION LOSS	ISOLATION	POWER HANDLING	TEMPERATURE
MVE7136	0.6-1	≤ 1.40	≤1.0dB	≥16dB	30W	-30~+70°C

Tolerance:±0.3mm

Outline Drawing (Unit: mm)

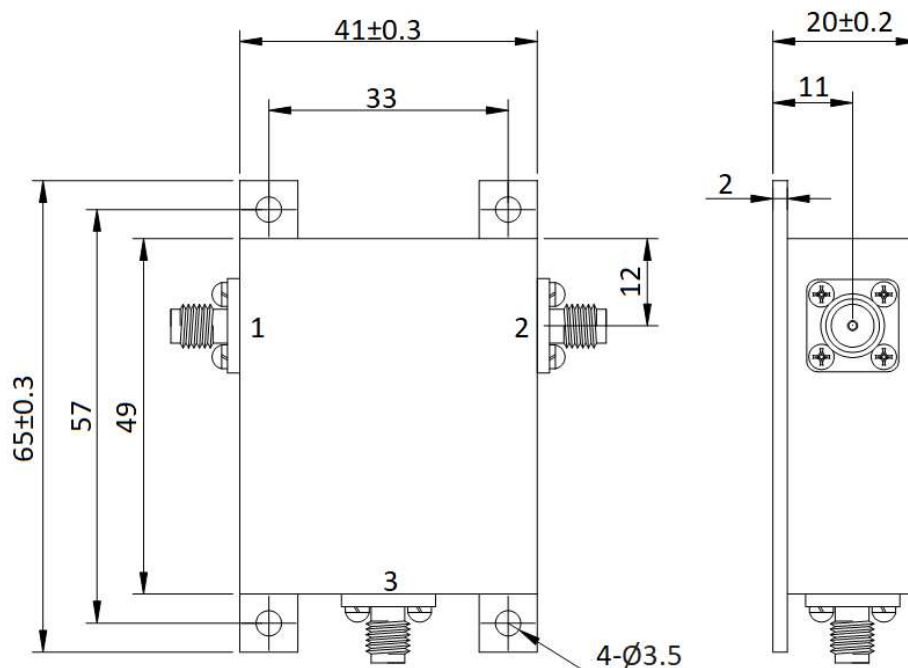

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

