

POWER DIVIDER

Resistive Type
DC-4.2GHz

Features

- ✓ Frequency Range: DC to 4.2 GHz
- ✓ Low Insertion Loss
- ✓ Low VSWR




Specifications

FREQUENCY RANGE: DC-4.2GHz
CONNECTOR TYPE: SMA FEMALE
TEMPERATURE RANGE: -40°C TO +80°C

PART NUMBER	WAYS	INSERTION LOSS	AMPLITUDE UNBALANCE	VSWR	AVERAGE POWER
MVE8246	2WAY	$\leq 6\pm 1.0\text{dB}$	$\leq \pm 0.4\text{dB}$	$\leq 1.30:1$	0.5W

Tolerance: $\pm 0.5\text{mm}$

Outline Drawing (Unit: mm)

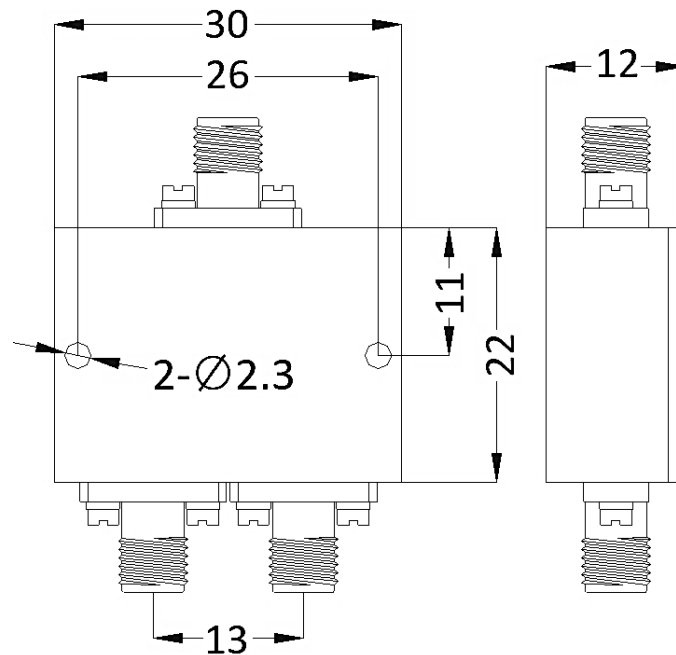

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

