

POWER DIVIDER

Resistive Type DC-6GHz

Features

- ✓ Frequency Range: DC to 6 GHz
- ✓ Low Insertion Loss
- ✓ Low VSWR



Specifications


CONNECTOR TYPE: SMA FEMALE
TEMPERATURE RANGE: -40°C TO +85°C

PART NUMBER	FREQUENCY	WAYS	INSERTION LOSS	AMPLITUDE UNBALANCE	VSWR	POWER HANDLING (CW)
MVE8247	DC-6GHz	2WAY	$\leq 6\pm 1.0\text{dB}$	$\leq 0.4\text{dB}$	$\leq 1.3:1$	0.5W

*Insertion Loss does not include 3.0 dB theoretical loss.

Tolerance: $\pm 0.5\text{mm}$

Outline Drawing (Unit: mm)

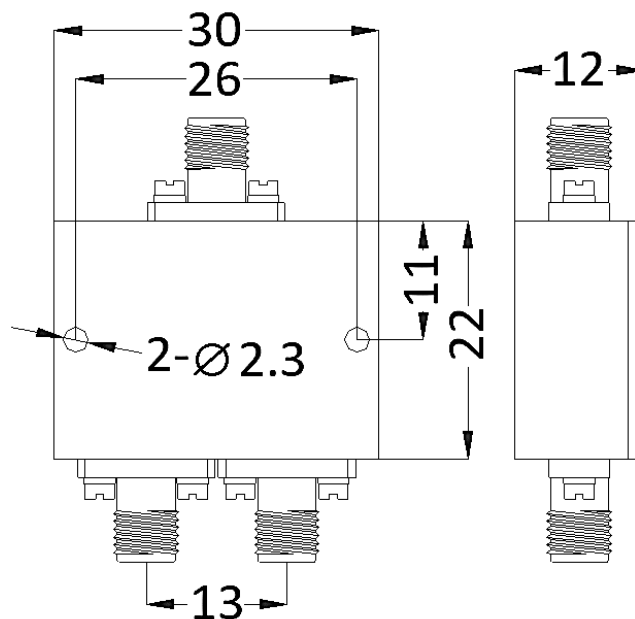

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY



Typical Test Result

