

POWER DIVIDER

Resistive Type DC-6GHz

Features

- ✓ Frequency Range: DC to 6 GHz
- ✓ Low VSWR
- ✓ Low Insertion Loss




Specifications

PART NUMBER	WAYS	FREQUENCY RANGE	INSERTION LOSS (MAX.)	VSWR (MAX.)	POWER HANDLING (CW)	CONNECTOR TYPE	TEMPERATURE RANGE
MVE8249	3WAY	DC-6GHz	9.5±0.8dB*	1.2:1	1W	SMA-F	-40°C+70°C


*Insertion Loss does not include 4.8 dB theoretical loss.

Outline Drawing (Unit: mm)

Tolerance: ±0.5mm

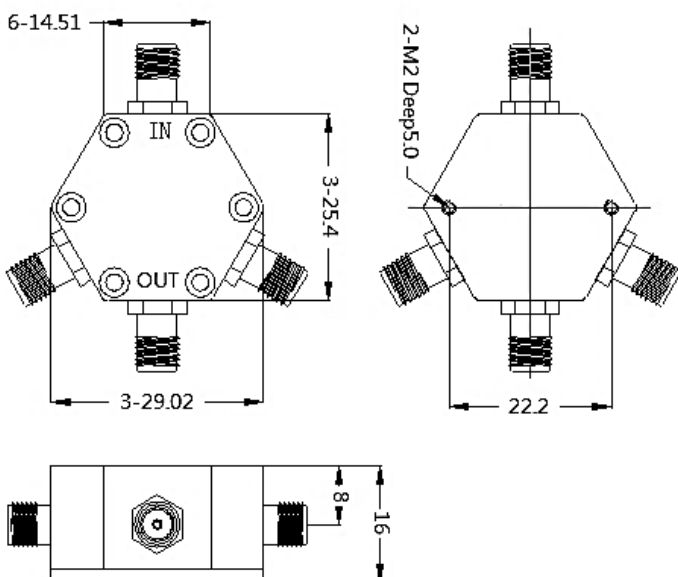

Typical Test Result

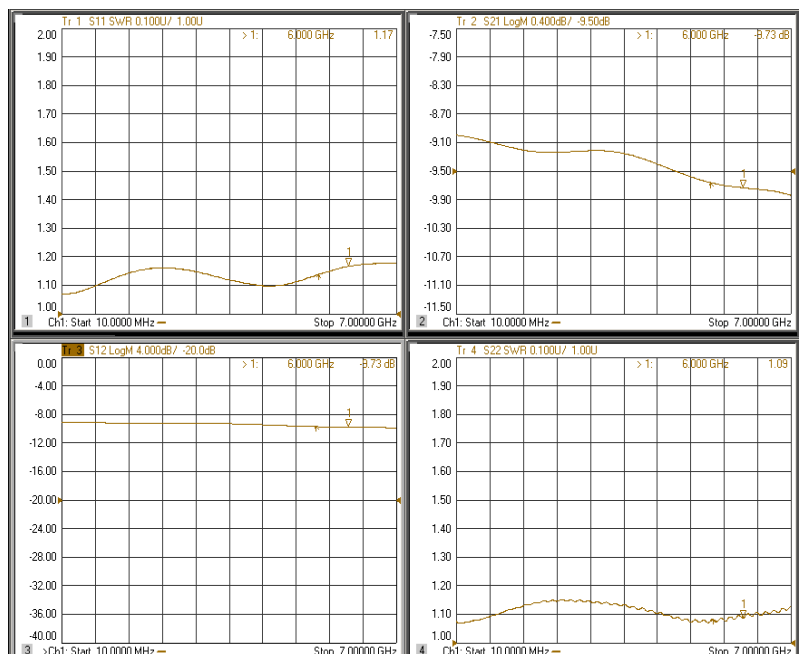

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

