

POWER DIVIDER

2.92 mm Resistive Type DC-40GHz

Features

- ✓ Frequency up to 40GHz
- ✓ Broadband design
- ✓ 2.92mm Interface

Specifications

FREQUENCY RANGE: DC-40GHz

CONNECTOR TYPE: 2.92mm FEMALE


TEMPERATURE RANGE: -55°C TO +80°C

PART NUMBER	WAYS	INSERTION LOSS (MAX.)	AMPLITUDE BALANCE	PHASE BALANCE	VSWR(MAX.)		POWER HANDLING
					INPUT	Output	
MVE8283	2WAY	≤7.5dB*	±0.4dB	±5°	1.50:1	2.50:1	≤1 Watts

*Insertion Loss includes 3 dB theoretical loss.

Tolerance: X= ±0.5

Outline Drawing (Unit: mm)

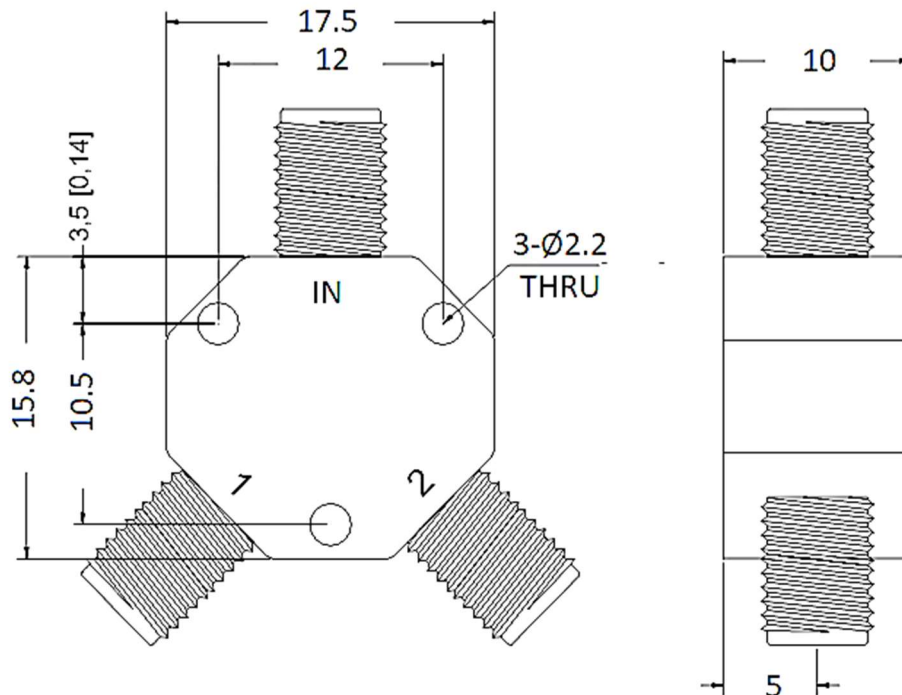

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

