

# POWER DIVIDER

1000-2000MHz  
2WAY

## Features

- ✓ Operating Frequency Range Coverage From 1000MHz to 2000MHz
- ✓ Low VSWR
- ✓ Low Insertion Loss

## Specifications

FREQUENCY RANGE: 1000-2000MHz

CONNECTOR TYPE: SMA FEMALE


TEMPERATURE RANGE: -40°C TO +80°C

| PART NUMBER | WAYS | INSERTION LOSS | ISOLATION | VSWR   |        | POWER HANDLING(CW) |         |
|-------------|------|----------------|-----------|--------|--------|--------------------|---------|
|             |      |                |           | Input  | Output | Forward            | Reverse |
| MVE8507     | 2WAY | ≤0.4dB         | ≥20dB     | 1.25:1 | 1.20:1 | 20W                | 2W      |

\*Insertion Loss does not include 3 dB theoretical loss.

Tolerance:±0.5mm

## Outline Drawing (Unit: mm)

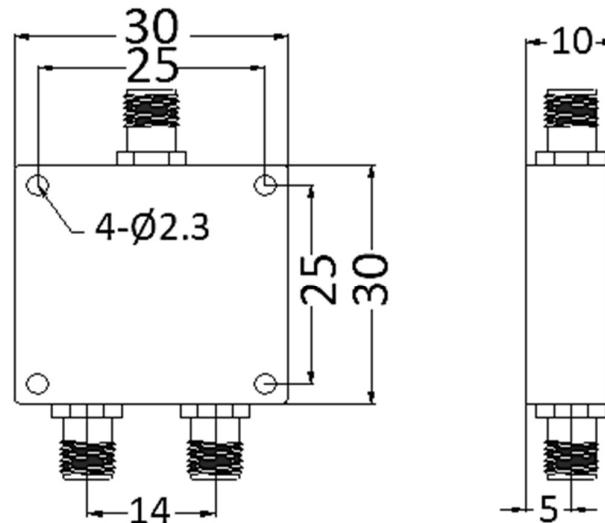

### NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

