

POWER DIVIDER

0.8-2.5GHz
2WAY

Features

- ✓ Wide band operation
- ✓ Low Insertion Loss
- ✓ High Isolation




Specifications

FREQUENCY RANGE: 0.8-2.5GHz
CONNECTOR TYPE: SMA FEMALE
TEMPERATURE RANGE: -45°C TO +85°C

PART NUMBER	WAYS	INSERTION LOSS (MAX)	PHASE UNBALANCE	AMPLITUDE UNBALANCE	ISOLATION (MIN.)	VSWR		POWER HANDLING(CW)		
						Input	Output	Forward	Reverse	PEAK
MVE8531	2WAY	0.4dB	±2°	±0.2dB	20dB	1.3:1	1.2:1	30W	2W	300W

Tolerance : ±0.25mm

Outline Drawing (Unit: mm)

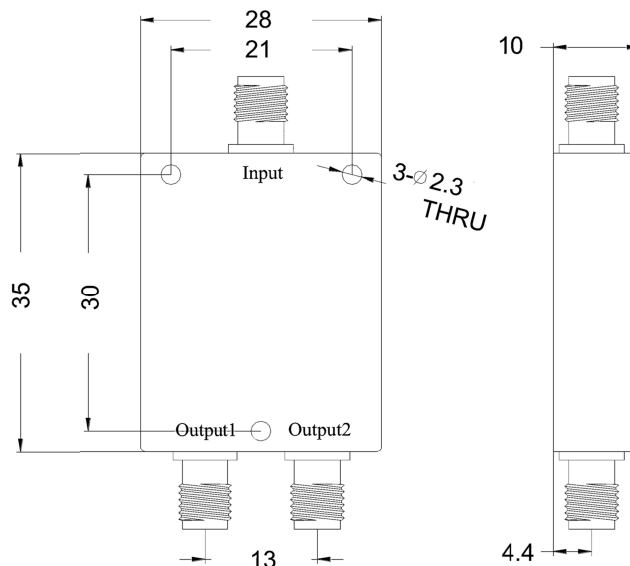

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

