

# POWER DIVIDER

**0.5-3.0GHz**  
**SMA 4WAY**

## Features

- ✓ Frequency up to 3 GHz
- ✓ Low Insertion Loss
- ✓ High Isolation

## Specifications

CONNECTOR TYPE: SMA FEMALE

TEMPERATURE RANGE: -25°C TO +65°C




PART NUMBER	WAYS	INSERTION LOSS (MAX)	PHASE UNBALANCE	AMPLITUDE UNBALANCE	ISOLATION (MIN.)	VSWR		POWER HANDLING(CW)	
						Input	Output	Forward	Reverse
MVE8537	4WAY	1.2dB*	±5°	±0.5dB	18dB	1.4:1	1.4:1	20W	2W

\*Insertion loss does not contain theory loss 6 dB

Tolerance:±0.5mm

## Outline Drawing (Unit: mm)

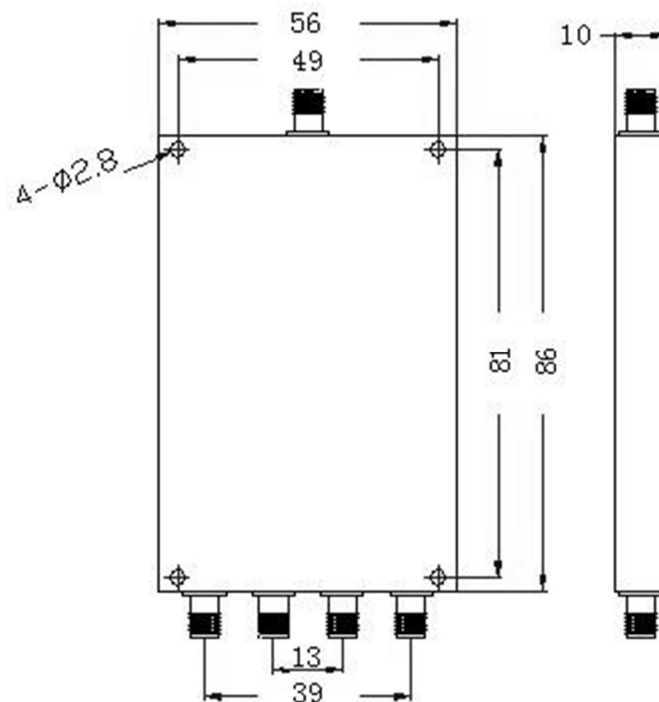

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

