

POWER DIVIDER

0.5-3.0GHz
3WAY

Features

- ✓ Operating Frequency Range Coverage From 0.5GHz to 3.0GHz
- ✓ Ultra Broad band
- ✓ Low Insertion Loss

Specifications

FREQUENCY RANGE: 0.5-3GHz


CONNECTOR TYPE: SMA FEMALE

TEMPERATURE RANGE: -25°C TO +65°C

PART NUMBER	WAYS	INSERTION LOSS	PHASE UNBALANCE	AMPLITUDE UNBALANCE	ISOLATION	VSWR	POWER HANDLING(CW)	
							Foward	Reverse
MVE8539	3WAY	≤1.2dB	±3°	±0.4dB	≥20dB	≤1.50:1	10W	2W

Tolerance:±0.25mm

Outline Drawing (Unit: mm)

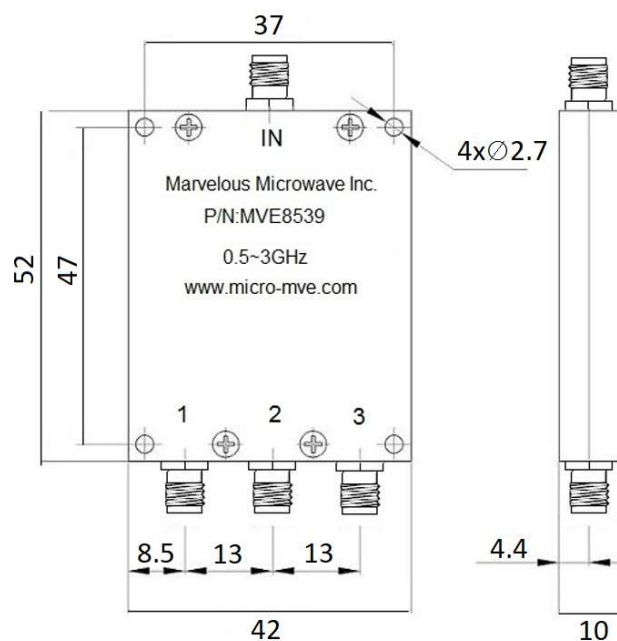

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

