

POWER DIVIDER

500-3000 MHz
4WAY

Features

- ✓ Operating Frequency Coverage From 500 to 3000MHz
- ✓ Broadband, low insertion loss, and high isolation
- ✓ N female connector I/O

Specifications


FREQUENCY RANGE: 0.5-3 GHz

CONNECTOR TYPE: N FEMALE

PART NUMBER	WAYS	INSERTION LOSS (MAX)	PHASE UNBALANCE	AMPLITUDE UNBALANCE	ISOLATION (MIN.)	VSWR		POWER HANDLING(CW)	
						Input	Output	Forward	Reverse
MVE8540	4WAY	1.2dB	$\pm 3^\circ$	$\pm 0.3\text{dB}$	18dB	1.50:1	1.30:1	30W	2W

Tolerance: $\pm 0.3\text{mm}$

Outline Drawing (Unit: mm)

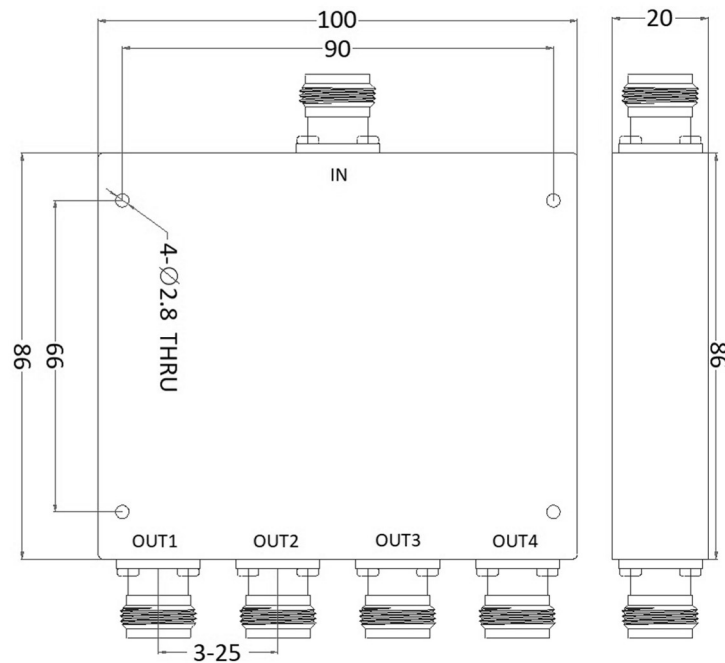

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

