

POWER DIVIDER

2-8GHz
16WAY

Features

- ✓ Frequency Range: 2 to 8GHz
- ✓ High Isolation
- ✓ Low Insertion Loss



Specifications

FREQUENCY RANGE: 2-8GHz

CONNECTOR TYPE: SMA FEMALE


OPERATIONAL TEMPERATURE: -40 TO +75°C

PART NUMBER	WAYS	INSERTION LOSS	PHASE BALANCE	AMPLITUDE BALANCE	ISOLATION	VSWR		AVERAGE POWER
						Input	Output	
MVE8595	16WAY	≤2.4dB	≤±8°	≤±0.5dB	≥18dB	≤1.80	≤1.50	20W(Forward) 2W(Reverse)

*Insertion Loss does not include 12.0 dB theoretical loss.

Tolerance: ±0.5mm

Outline Drawing (Unit: mm)

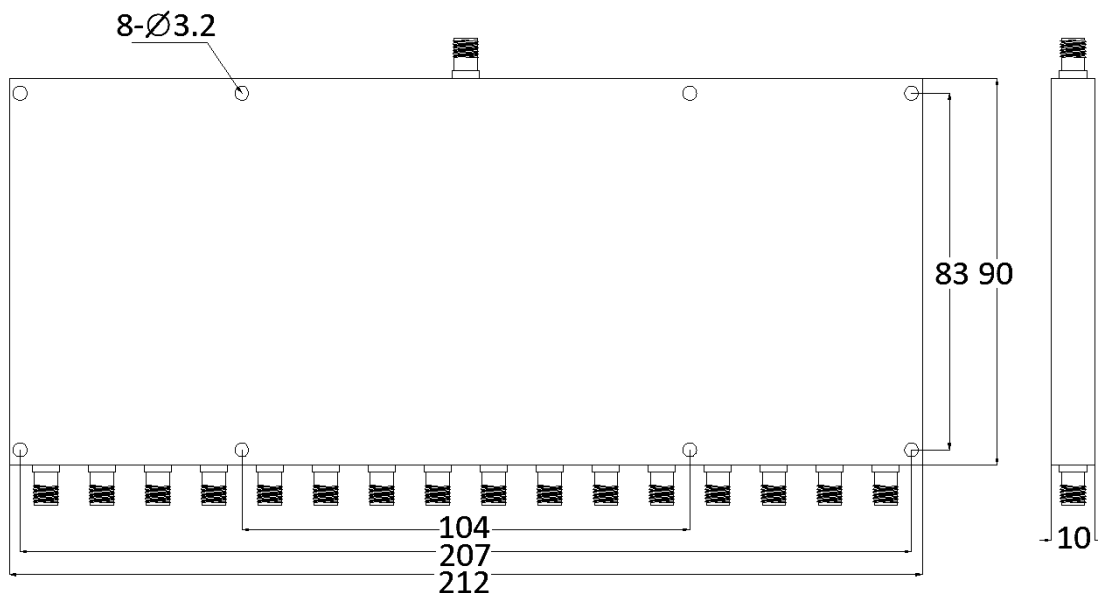

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

