

# POWER DIVIDER

7000-12400MHz  
2 WAY

## Features

- ✓ Frequency coverage from 7000MHz to 12400MHz
- ✓ Low Insertion Loss
- ✓ High Isolation

## Specifications

CONNECTOR TYPE: SMA FEMALE

TEMPERATURE RANGE: -40°C TO +80°C


SURFACE FINISH: GREY PAINTING

PART NUMBER	WAYS	INSERTION LOSS (MAX.)	PHASE BALANCE	AMPLITUDE BALANCE	ISOLATION (MIN.)	VSWR		POWER HANDLING	
						Input	Output	Forward	Reverse
MVE8623	2WAY	0.7dB	±4°	±0.3dB	16dB	1.7:1	1.7:1	20W	2W

\*Insertion Loss does not include 3 dB theoretical loss.

Tolerance:±0.3mm

## Outline Drawing (Unit: mm)

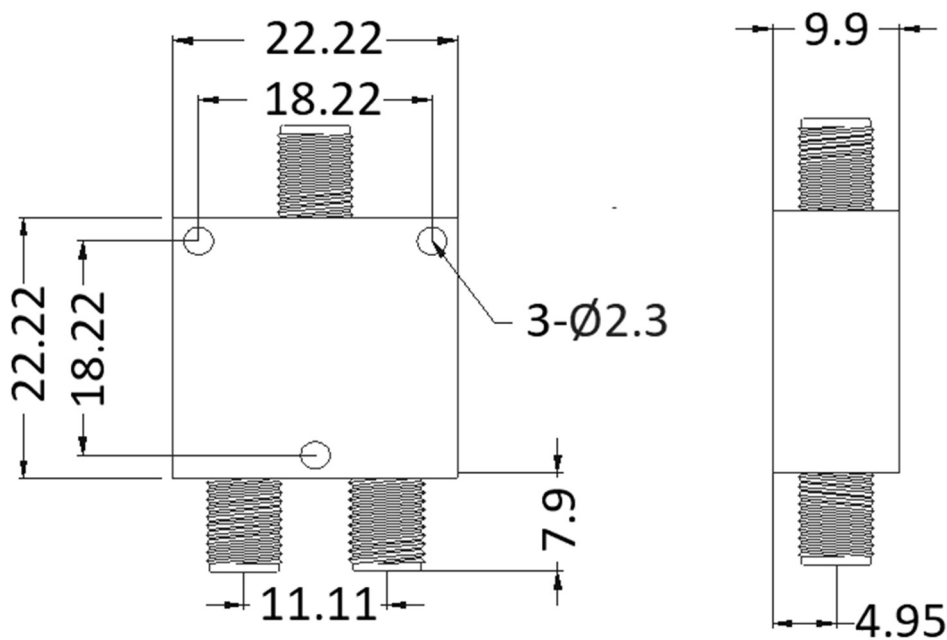

NOTES:  
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME  
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

