

## COAXIAL SWITCH

## DPDT FAILSAFE FUNCTION

### Features

- ✓ Frequency up to 18GHz
- ✓ High Isolation
- ✓ Low Insertion Loss



PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER
<b>MVE9112</b>	<b>MVE9112-18</b>	<b>MVE9112-24</b>	<b>MVE9112-28</b>
DC 12V	DC 18V	DC 24V	DC 28V


### SPECIFICATIONS

#### FREQUENCY:DC-18GHz


RF CHARACTERISTICS					
FREQUENCY RANGE	DC-2GHz	2-6GHz	4-8GHz	8-12.4GHz	12.4-18GHz
VSWR MAX.	1.20:1	1.20:1	1.25:1	1.30:1	1.40:1
INSERTION LOSS MAX.	0.20dB	0.20dB	0.25dB	0.30dB	0.40dB
ISOLATION MIN.	90dB	70dB	70dB	70dB	60dB
ELECTRICAL CHARACTERISTICS					
ACTUATOR	Failsafe				
ACTUATOR VOLTAGE(V)	380mA/DC 12V				
MECHANICAL CHARACTERISTICS					
CONNECTOR TYPE	SMA Female				
POWER INTERFACE	D-sub				
ACTUATOR LIFESPAN	1,000,000				
SWITCHING TIME	<15ms				
SHOCK (NON OPERATING)	50G, 1/2Sine, 12msec				
VIBRATION (OPERATING)	10G RMS, 20-2000HZ				
Weight	180g				
ENVIRONMENTAL CHARACTERISTICS					
TEMPURATURE RANGE	-25°C+80°C				

Tolerance:  $\pm 0.5\text{mm}$


## Outline Drawing (Unit: mm)

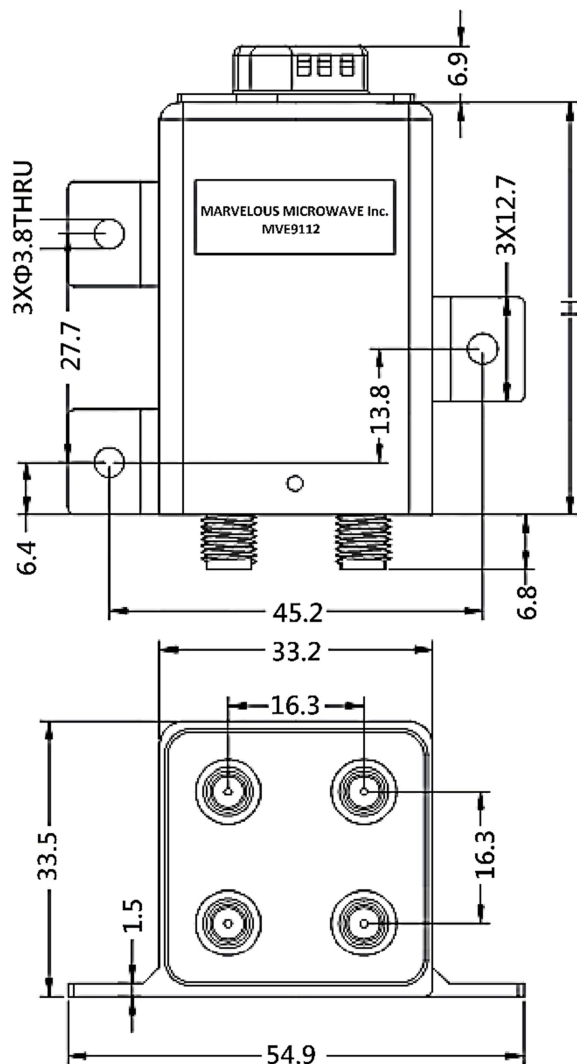

## SCHEMATIC DIAGRAM



IN	CONTROL	DRIVE VOLTAGE(V)
1	1 $\leftrightarrow$ 3 2 $\leftrightarrow$ 4	/
2	/	/
3	GND	/
4	/	/
5	/	/
6	/	/
7	/	/
8	/	/
9	+VDC	12V

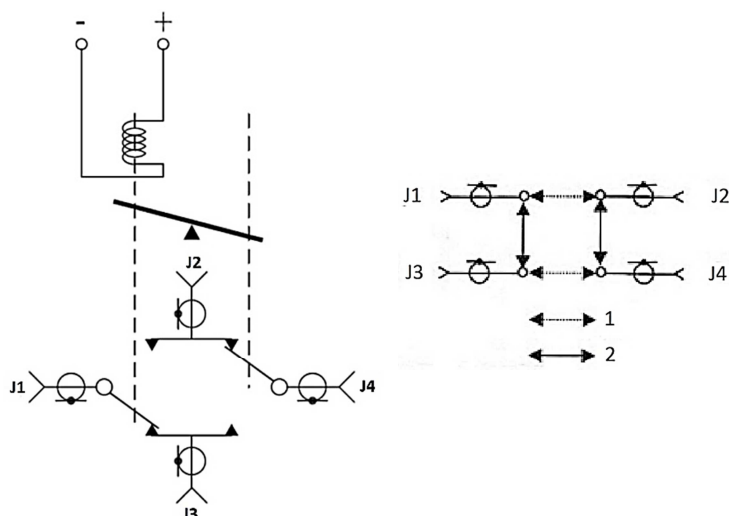

### NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

