

WAVEGUIDE SWITCH

WR90


Features

- ✓ Frequency Range: 8.2-12.4GHz
- ✓ WR90 waveguide design, connect to UBR100 Mod
- ✓ Customer specify center frequency and bandwidth

Specifications

PART NUMBER	MWSH9001
DESCRIPTION	WR90, 8.2-12.4GHz Waveguide Switch
ELECTRICAL	
FREQUENCY : 8.2-12.4GHz WAVEGUIDE: WR90 VSWR: 1.15:1 MAX. INSERTION LOSS: 0.3dB MAX. FLANGE: UBR100 ISOLATION BETWEEN PORTS: 60dB MIN. HANDLING POWER(AVG.): 500W MAX.	
MATERIALS	
BODY: COPPER INSIDE FINISH: SILVER PLATING OUTSIDE FINISH: ANTICORROSION BLACK PAINT TEMPERATURE RANGE: -40°C~ +70°C	

Outline Drawing (Unit: mm)

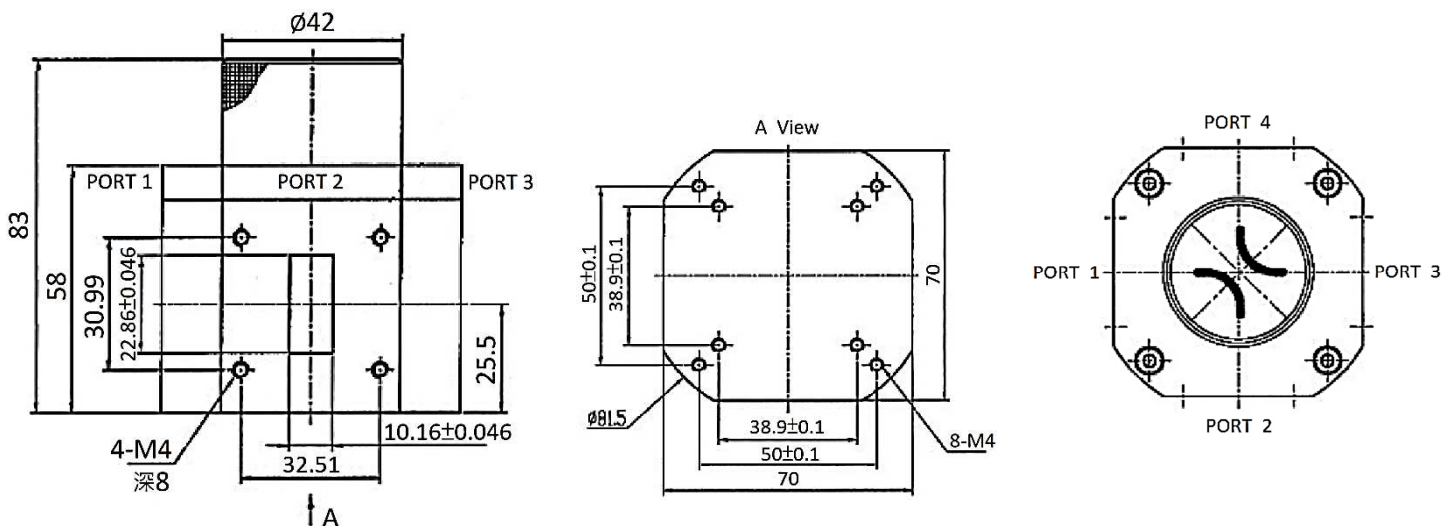

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

