

ELECTRICAL DATA

FREQUENCY: DC-8GHz

IMPEDANCE: 50Ω

VSWR: 1.35:1@DC-8GHz

INSULATION RESISTANCE: 1000Mega-ohms

DIELECTRIC WITHSTANDING: 500Vrms


CENTER CONTACT RESISTANCE: 8.0 Mini-Ohms

OUTER CONTACT RESISTANCE: 6.0 Mini-Ohms

MECHANICAL DATA

COUPLING METHOD: SNAP-ON

DURABILITY(MATING/UNMATING): 8K CYCLES

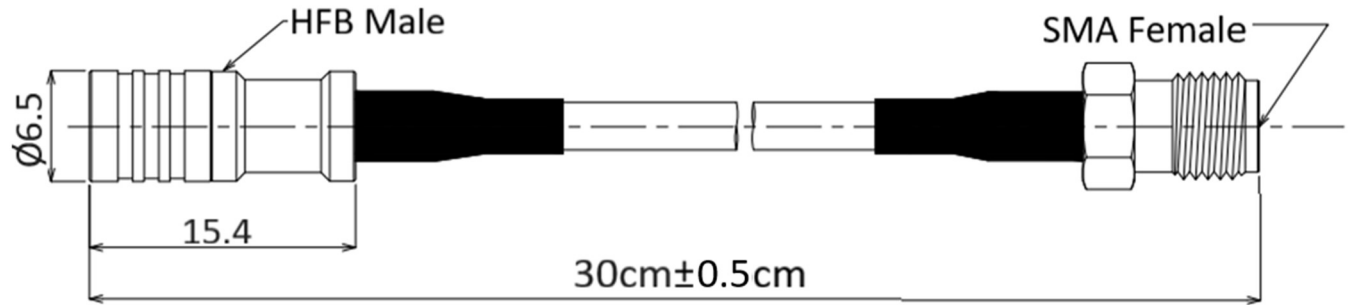

ROHS COMPLIANCE

DESCRIPTION	MATERIALS	ROHS COMPLIANCE	UNIT: mm
HFB MALE	BRASS,NICKEL/GOLD PLATED	TOLERANCE: X=±0.38 X.X=±0.25 X.XX=±0.15	
SMA FEMALE	BRASS,GOLD PLATED	TITLE SMA Female To HFB Male , Flexible 085	
INSULATOR	TEFLON	Blue/L:30cm/Brass Tubing	

MVE Microwave 芝程科技有限公司
www.micro-mve.com

DC-67GHz RF& Microwave Components

PART NO.	MAC290820.F085.30A	REV 1.0
SIZE: A	SHEET: 1/1	SCALE:

NOTES

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY