

## ELECTRICAL DATA

FREQUENCY: DC-6GHz

IMPEDANCE: 50Ω


VSWR: 1.50:1@DC-6GHz

INSULATION RESISTANCE: 1000Mega-ohms

DIELECTRIC WITHSTANDING: 500Vrms

CENTER CONTACT RESISTANCE: 8.0 Mini-Ohms

OUTER CONTACT RESISTANCE: 6.0 Mini-Ohms

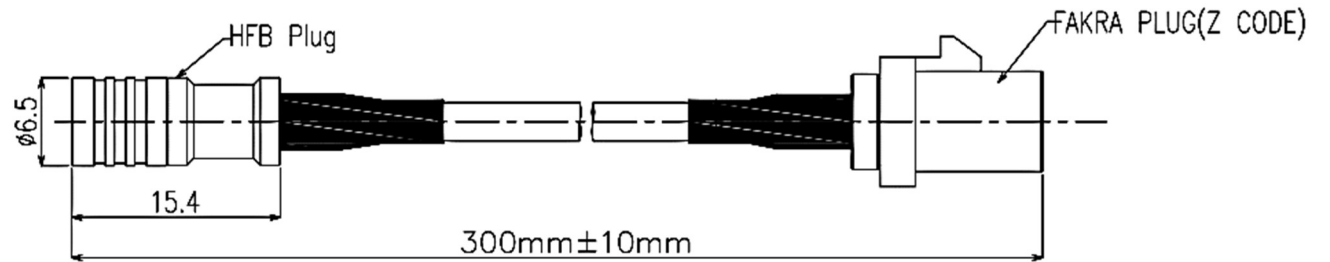


## MECHANICAL DATA

COUPLING METHOD: SNAP-ON

DURABILITY(MATING/UNMATING): 8K CYCLES

## ROHS COMPLIANCE

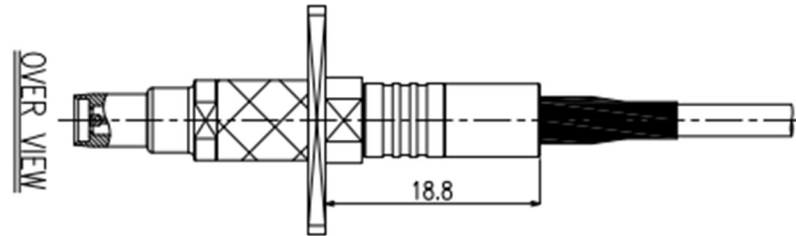

DESCRIPTION	MATERIALS	ROHS COMPLIANCE	UNIT: mm
BODY	BRASS ,NICKEL/GOLD PLATED	TOLERANCE: X=±0.38 X.X=±0.25 X.XX=±0.15	
CONTACT PIN	BRASS, GOLD PLATED	TITLE HFB Plug to FAKRA PLUG(Z CODE), DC-6GHz, Flexible 085 Blue / L:30cm / VSWR<1.5	
INSULATOR	TEFLON		

**MVE** 芝程科技有限公司

[www.micro-mve.com](http://www.micro-mve.com)

DC-67GHz RF& Microwave Components

PART NO.	<b>MAC79Z820.F085.30</b>	REV 1.0
SIZE: A	SHEET: 1/1	SCALE:

## NOTES

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY