

# COAXIAL CONNECTOR

## MCX FOR PCB TYPE

### Feature


- ✓ Frequency up to 6 GHz
- ✓ High Durability
- ✓ High performance design



### Specifications

<b>PART NUMBER</b>	MVE3104-9.28
<b>DESCRIPTION</b>	MCX Female S/T Dip For PCB Connector
<b>ELECTRICAL</b>	
FREQUENCY: DC-6GHz IMPEDANCE: 50 OHM WORKING VOLTAGE: 500Vrms MAX. DIELECTRIC WITHSTANDING VOLTAGE: 750Vrms MAX. INSULATOR RESISTANCE: 5000 MEGOHMS MIN. TOLERANCE: X=±0.2 X.X=±0.1 X.XX=±0.05	
<b>MATERIALS</b>	
BODY: BRASS, GOLD PLATED CONTACT: BE BRONZE, GOLD PLATED INSULATOR: TEFLON	

### Outline Drawing (Unit: mm)

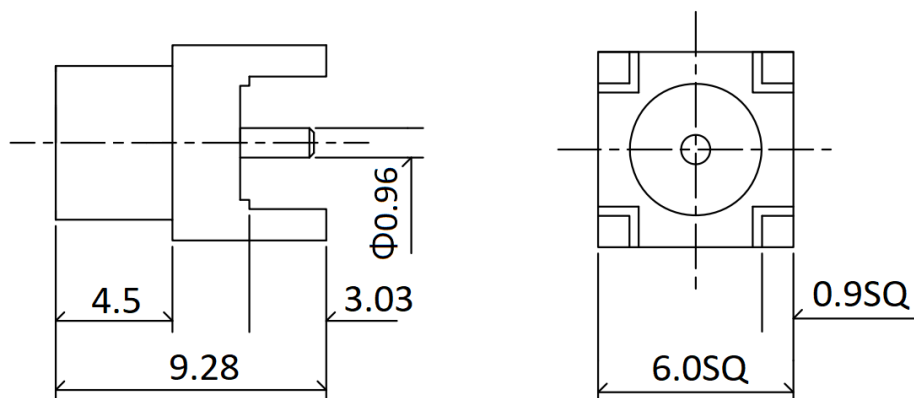

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

