

# COAXIAL CONNECTOR

## SMA PCB DIP Type

### Features


- ✓ Frequency up to 6 GHz
- ✓ Low VSWR
- ✓ SMA Female R/A Interface

### Specifications

<b>PART NUMBER</b>	MVE3108-15.1B
<b>DESCRIPTION</b>	SMA Female R/A For PCB Connector, DIP DC-6GHz
<b>ELECTRICAL</b>	<b>MATERIALS</b>
FREQUENCY: DC-6GHz IMPEDANCE: 50 ohm VSWR: 1.50:1 MAX. WORKING VOLTAGE: 500Vrms MAX. DIELECTRIC WITHSTANDING VOLTAGE: 1000Vrms MAX. INSULATOR RESISTANCE: 1000MEGOHMS MIN.	BODY: BRASS, GOLD PLATED CONTACT: BE COPPER, GOLD PLATED 20u" INSULATOR: TEFLON

TOLERANCE: X=±0.2 X.X=±0.1 X.XX=±0.05

### Outline Drawing (Unit: mm)

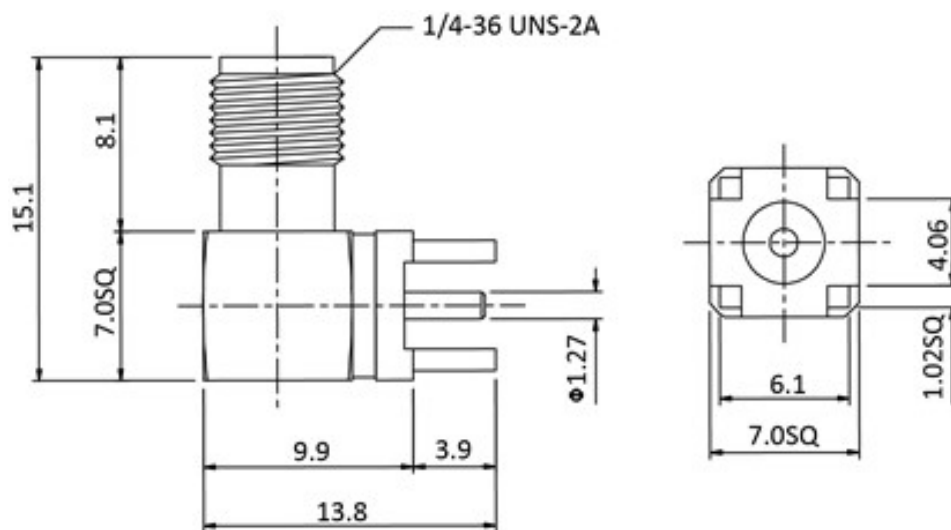

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

