

COAXIAL CONNECTOR

SMA MALE For PCB Connector

Features

- ✓ Frequency up to 12.4 GHz
- ✓ High Durability
- ✓ High performance design




Specifications

PART NUMBER	MVE3119-16.8
DESCRIPTION	SMA Male S/T For PCB Connector, DIP DC-12.4GHz
ELECTRICAL	MATERIALS
FREQUENCY: DC-12.4GHz IMPEDANCE: 50 ohm WORKING VOLTAGE: 500Vrms MAX. DIELECTRIC WITHSTANDING VOLTAGE: 1000Vrms MAX. INSULATOR RESISTANCE: 5000 MEGOHMS MIN.	BODY: BRASS, GOLD PLATED CONTACT: BRASS, GOLD PLATED INSULATOR: PTFE SHELL: BRASS, GOLD PLATED C-RING: BE COPPER GASKET: SILICON

TOLERANCE: X=±0.2 X.X=±0.1 X.XX=±0.05

Outline Drawing (Unit: mm)

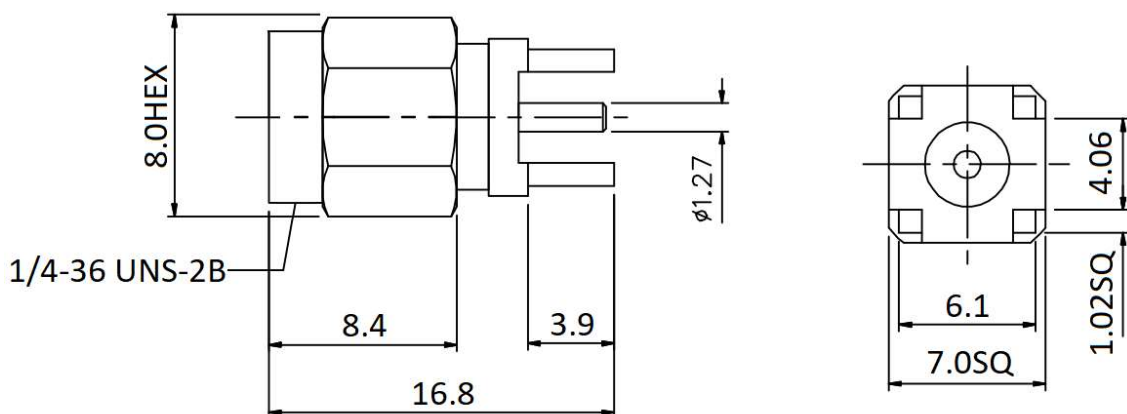

NOTES:
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

