

COAXIAL CONNECTOR

SMA 4 Hole Precision Series

Features


- ✓ Frequency up to 27 GHz
- ✓ Low VSWR
- ✓ Interface Standards: SMA MIL-STD-348A

Specifications

PART NUMBER	MVE3423-13.9H
DESCRIPTION	SMA Female S/T 4 Hole Flange Connector, DC-27GHz/Stainless
ELECTRICAL	MATERIALS
FREQUENCY: DC-27GHz IMPEDANCE: 50 OHM VSWR: 1.15:1 MAX. CONTACT RESISTANCE: -CENTRE CONTACT: $\leq 3m\Omega$ -OUTER CONTACT: $\leq 2m\Omega$ INSULATION RESISTANCE: $\geq 5000M\Omega$ DURABILITY: 500MIN. TEMPERATURE RANGE: $-55^{\circ}C$ to $+165^{\circ}C$	BODY: SUS303, Passtivated CONTACT: Beryllium Copper Alloy, Gold-plated INSULATOR: PEI & PTFE

Tolerance: X= ± 0.5 X.X= ± 0.2 X.XX= ± 0.13

Outline Drawing (Unit: mm)

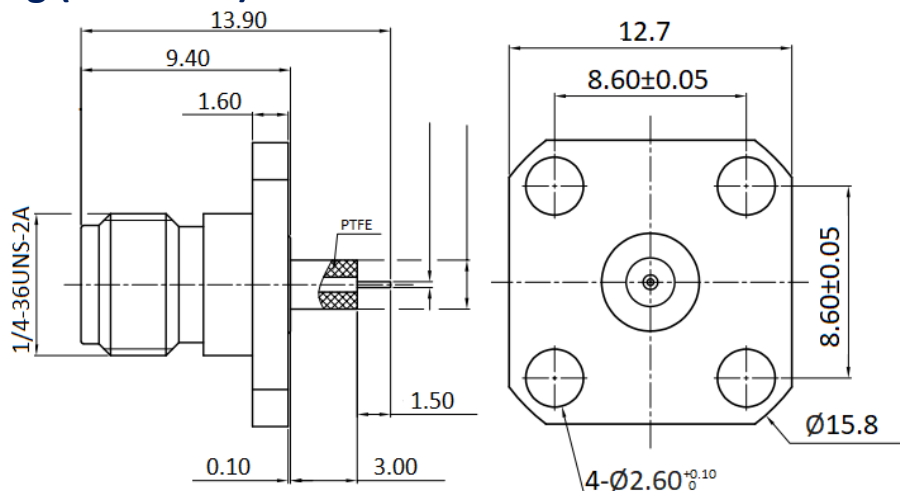

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

